

Specification
for
General purpose AC Servo
Encoder / Power supply cable

Type SC-AEP3J1C0.3M-■-L

MITSUBISHI ELECTRIC
SYSTEM & SERVICE CO.,LTD

Note

Revision								Drawn	Check	Design	Approved
								N. Ishii	I. Kojima	I. Minenaga	D. Takahashi
Send to								Date		Dwg	
								24 Apr., 2019		X953503D70003-E03	
								Order			

1. SCOPE


This specification covers the requirements for the General purpose AC Servo Encoder / Power supply cable.

- SC-AEP3J1C0.3M-■-L

※ The Products covered in this specification don't include the toxic substances in RoHS2 (Lead, Mercury, Cadmium, Hexavalent Chromium, PBDE, PBB, HBCDD, DEHP, BPP, DBP).

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

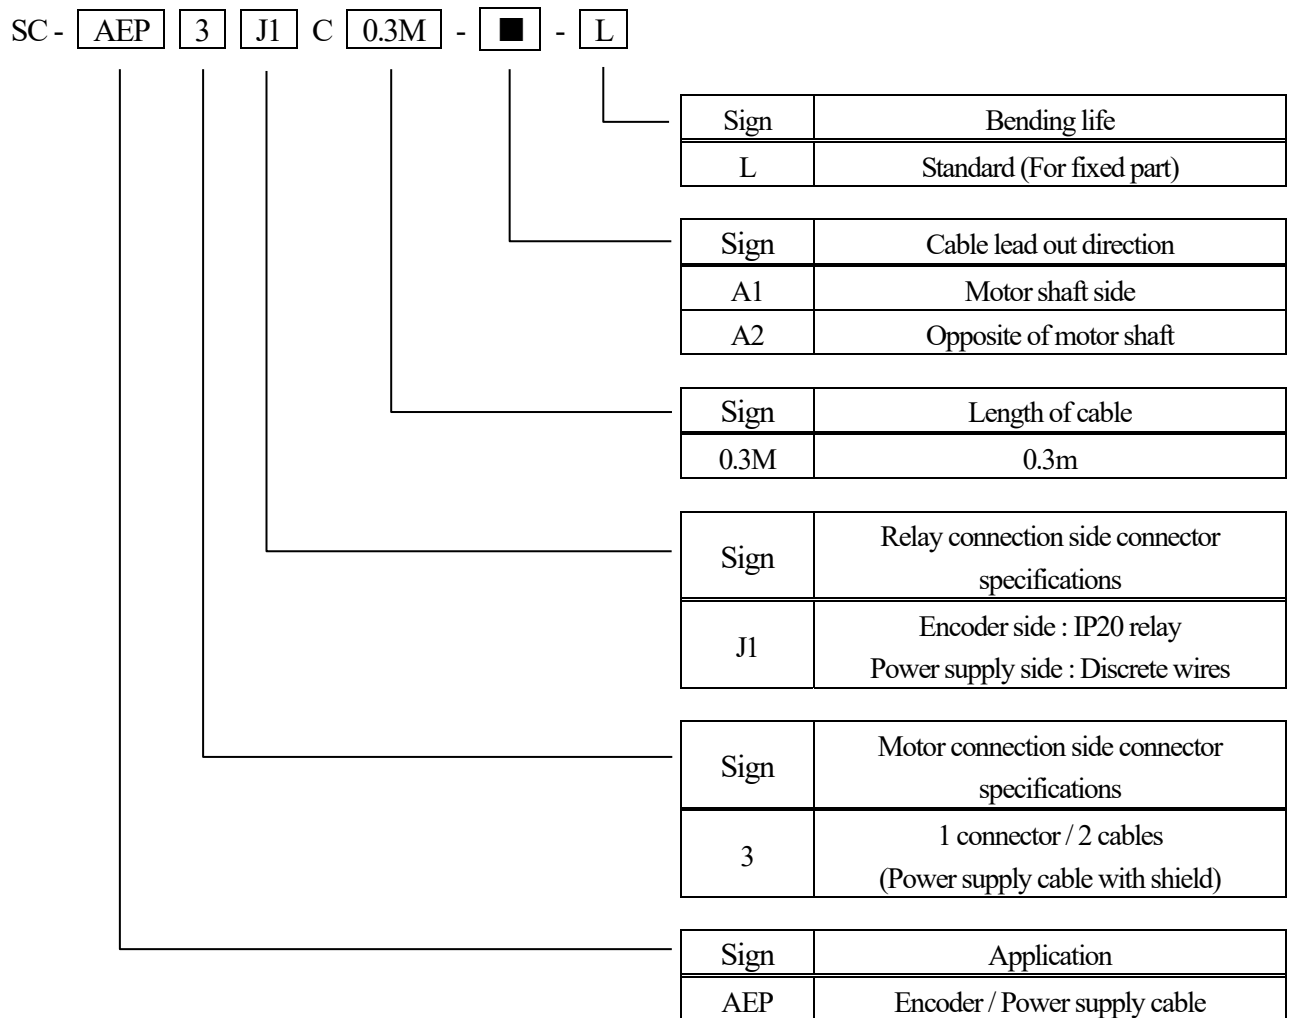

3. APPLICABLE STANDARDS

Wire part : UL standard (UL 758 : AWM)

Application department	UL Style No.	Rated	
Encoder cable side	20276	80°C	30V
Power supply cable side	2586	105°C	600V

4. LENGTH OF CABLE

0.3m

5. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-AEP3J1C0.3M-■-L xxxxxxxx

※ ■ is cable lead out direction from A1, A2.

※ xxxxxxxx are the serial number for seven digits.


6. STRUCTURE AND CHARACTERISTICS

Item		Unit	Specification	
			For encoder	For power supply
Structure		—	AWG24×4P	AWG18×4C
Conductor	Conductor size	—	AWG24	AWG18
	Outer diameter	mm	Approx.0.6	Approx.1.3
Insulation	Material	—	PVC	ETFE
	Outer diameter	mm	Approx.1.1	Approx.1.8
Twisted pair	Number of insulated core wire	—	2C	—
	Outer diameter	mm	2.2	—
Twisted	Number of pairs	—	4P	—
	Number of insulated core wire	—	—	4C
Drain wire		—	Tin coated copper wire	—
Shield	Material	—	Tin coated copper braid	Tin coated copper braid
Sheath	Material	—	Flame resisting PVC	Flame resisting PVC
	color	—	Black	Black
Overall diameter		mm	Approx. 7.5	Approx. 7.5
Electrical characteristics	Insulation resistance	MΩ · km	Over 10	Over 100
	Withstand voltage	V / for 1 min	AC500	AC1800
Operating temperature range		°C	-10~+60 (without condensation)	-10~+60 (without condensation)
Minimum bend radius		mm	6 times the overall diameter	6 times the overall diameter
Flame retardant		—	UL1581 VW-1	UL1581 VW-1
Connector				
Amplifier side	Encoder side	Type	Tyco Electronics Japan Ltd. 1-172169-9 (Housing plug) 316454-1 (Cable clamp)	
		IP rating	IP20*1	
	Power supply side	—	Discrete wires	
Motor side		Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVLD(7.5) (Connector set)	
		IP rating	IP65*1	


*1 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

7. STRUCTURAL DRAWING

7.1. For encoder

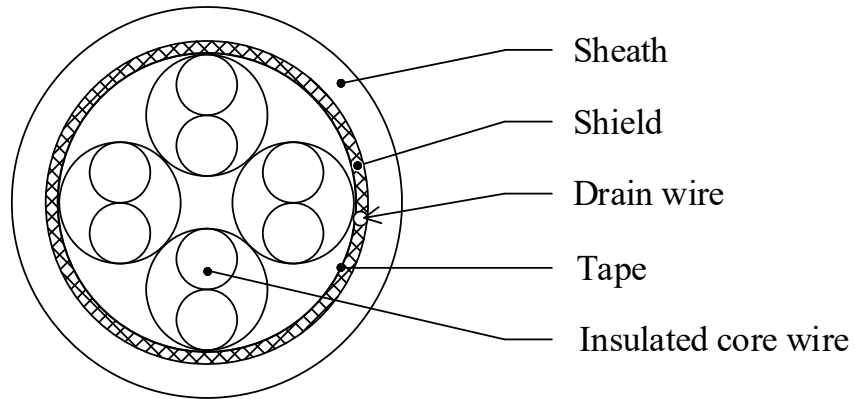


7.2. For power supply

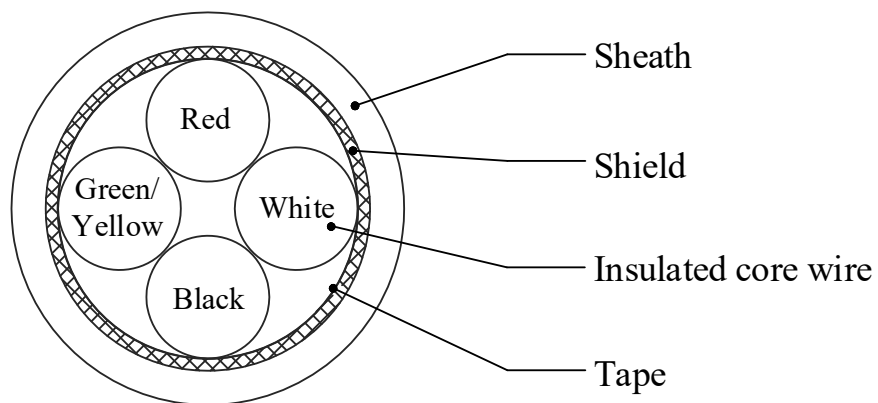

8. OUTLINE DRAWING

[Unit : mm]

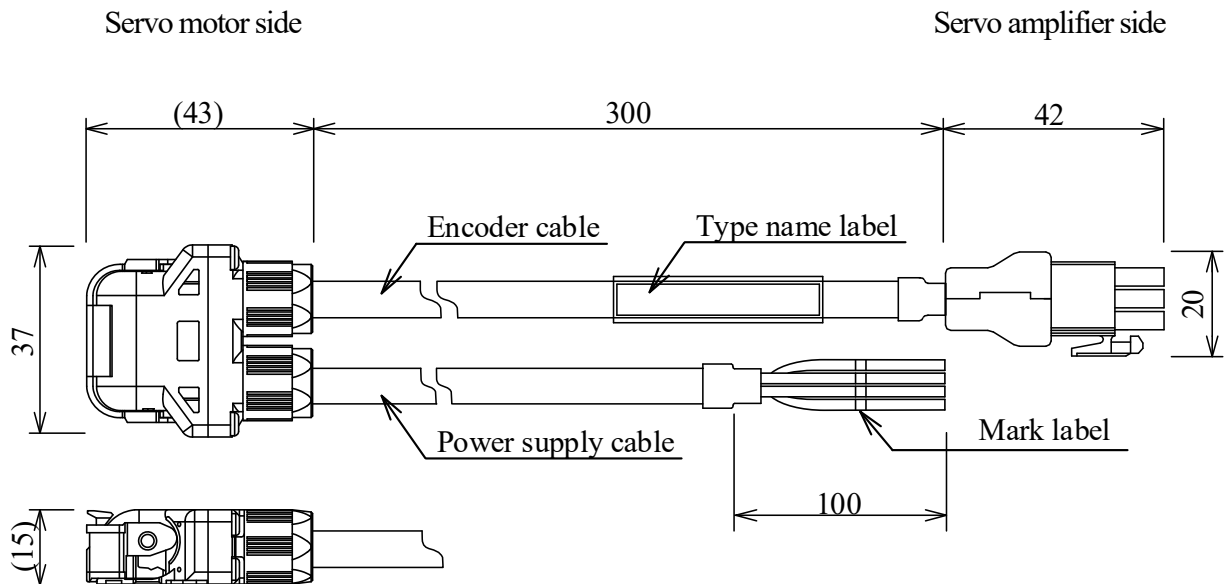

※ This outline drawing is for the cable lead out direction “A1”.

The cable lead out direction “A2” reverses the position of the encoder cable and the power supply cable.

Refer to the following table for mark label and insulation color.

Mark label	Insulation color
U	Red
V	White
W	Black
E	Green / Yellow