

Specification
for
General purpose AC Servo
Power supply cable

Type SC-PWC403JDC□M-LH

MITSUBISHI ELECTRIC
SYSTEM & SERVICE CO.,LTD

Note

Revision								Drawn	Check	Design	Approved
								N.Ito	S.Kariya	T.Kasahara	D.Fukushima
Send to								Date		Dwg	
								8 Sep.,2022		X953503D70003-E83	
								Order			

UL Style No.	Rated	
2586	105°C	600V

4. APPLICABLE SERVO MOTOR / LENGTH OF CABLE

1 to 100m

※ The maximum length of this cable varies depending on the motor model and amplifier side cable to be combined. Please contact us for more information.

※ Refer to the CABLE SELECTION TABLE "R9535021-018028-015" for applicable motors and connection cables.

5. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-PWC403JDC□M-LH xxxxxxxx

※ □ is a figure from 1 to 100.

※ xxxxxxxx are the serial number for seven digits.


6. STRUCTURE AND CHARACTERISTICS

Item		Unit	Specification
Wire			
Structure		—	AWG12×4C
Conductor	Conductor size	—	AWG12
	Outer diameter	mm	Approx.2.6
Insulation	Material	—	ETFE
	Outer diameter	mm	Approx.3.4
Twisted	Number of insulated core wire	—	4C
Sheath	Material	—	Flame resisting PVC
	color	—	Black
Overall diameter		mm	Approx. 10.9
Cable weight		kg/km	230
Electrical characteristics	Insulation resistance	MΩ・km	Over 100
	Withstand voltage	V / for 5 min	AC2000
Minimum bend radius		mm	6 times the overall diameter
Bending life		—	Over 1 million times ^{*1} (by Minimum bend radius)
Flame retardant		—	UL1581 VW-1
Connector			
Amplifier side		Type	DDK Ltd. D/MS3101A18-10P(D263) (Cable receptacle) CE02-18BS-S-D(R1) (Waterproof straight back shell) CE3057-10A-1-D(R1) (Cable clamp)
		IP rating	IP67 ^{*2}
Motor side		Type	Japan Aviation Electronics Industry, Ltd. JL10-6A18-10SE-EB (Straight plug) JL04-18CK(13)-R (Waterproof cable clamp)
		IP rating	IP67 ^{*2}
Cable harness			
Environment	Ambient temperature	℃	0 to 60 (Without freezing)
	Ambient humidity	%RH	5 to 95 (Without condensation)
	Ambience	—	Indoors (no direct sunlight), no corrosive gas, inflammable gas, oil mist, or dust
Electrical characteristics	Insulation resistance	MΩ・km	Over 10
	Withstand voltage	V / for 1 min	AC2000

*1 It is a test outcome, and not a guaranteed value. (The performance is different according to customer's environment.)

*2 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

7. STRUCTURAL DRAWING

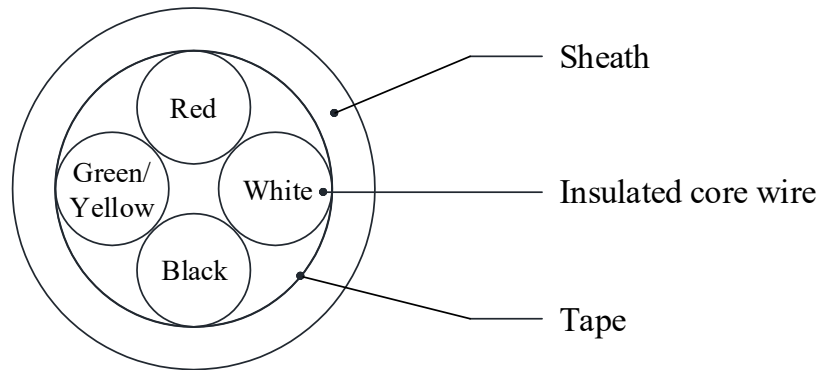

8. OUTLINE DRAWING

[Unit : mm]

