


1. SCOPE

This specification covers the requirements for the General purpose AC Servo Power supply cable type SC-PWS4CBL□M-LL.

※ The Products covered in this specification don't include the toxic substances in RoHS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBDE, PBB).

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

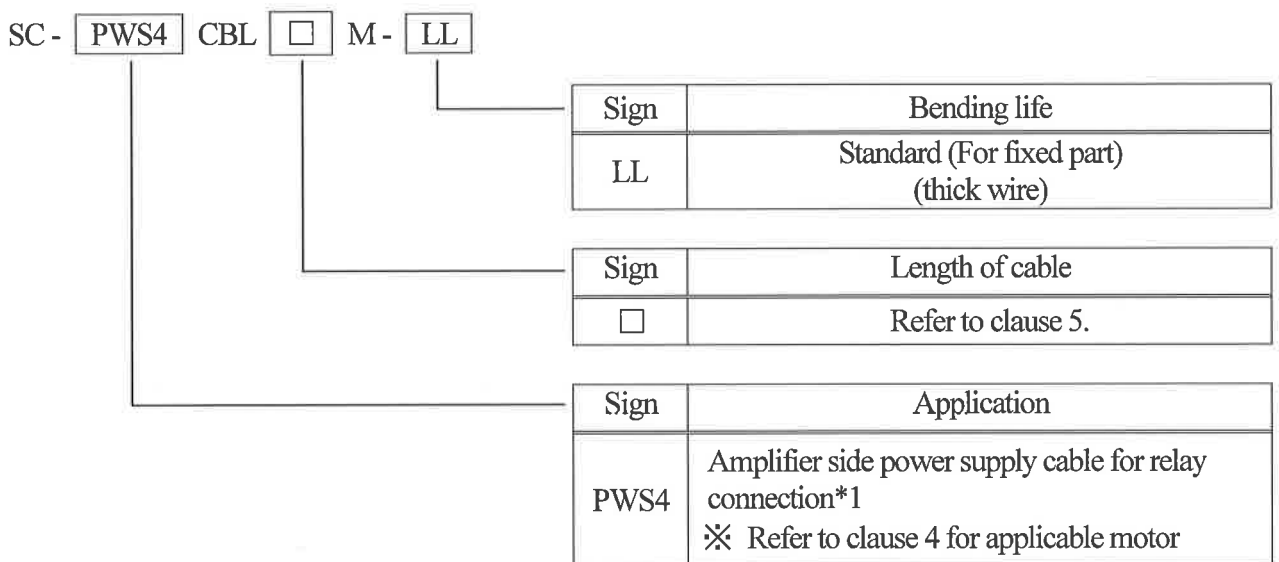

*1 Please use it with motor side power supply cable.
Refer to clause 6 for confirming the combination and cable length.

(Note) This cable doesn't have clamps for fixture. Please use cable ties or alternatives which can fix cable part; otherwise it might put too much stress on cables and cause disconnection.

3. APPLICABLE STANDARDS

UL758 AWM STYLE 2586 (wire part)

4. APPLICABLE SERVO MOTOR

HG-KR, HG-MR series motor
HF-KN, HF-KP, HF-MP series motor

5. LENGTH OF CABLE

1 to 50m Specified by 1m unit

6. CABLE LENGTH FOR RELAY CONNECTION

Motor type name	Combination		Total cable length
	Amplifier side	Motor side	
HG-KR/MR 053,13,23,43 HF-KN/KP/MP 053,13,23,43	SC-PWS4CBL□M-LL	SC-PWS4JCBL□M-■-L	50m or less
		SC-PWS4JCBL□M-■-H	
		SC-PWS4JCBL□M-■-S	
HG-KR73 HF-KP73	SC-PWS4CBL□M-LL	SC-PWS4JCBL□M-■-L	30m or less
		SC-PWS4JCBL□M-■-H	25m or less
		SC-PWS4JCBL□M-■-S	20m or less
HG-MR73 HF-MP73	SC-PWS4CBL□M-LL	SC-PWS4JCBL□M-■-L	25m or less
		SC-PWS4JCBL□M-■-H	15m or less
		SC-PWS4JCBL□M-■-S	

7. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-PWS4CBL□M-LL ×××××××

※ □ is a figure from 1 to 50.


※ ××××××× are the serial number for seven digits.

8. STRUCTURE AND CHARACTERISTICS


Item		Unit	Specification
Structure		—	AWG16×4C
Conductor	Conductor size	—	AWG16
	Outer diameter	mm	Approx. 1.53
Insulation	Material	—	PVC
	Outer diameter	mm	Approx. 3.23
Twisted pair	Number of insulated core wire	—	4C
Sheath	Material	—	Flame resisting PVC
	color	—	Black
Overall diameter		mm	Approx. 9.9
Electrical characteristics	Insulation resistance	MΩ · km	Over 10
	Withstand voltage	V/for 1min	AC1500
Operating temperature range		°C	-10~+60 (without condensation)
Minimum Bend Radius		mm	Over 60
Flame Retardant		—	UL1581 VW-1
Connector	Servo amplifier side		—
	Servo motor side	Type	Molex 5559-04P-210 (Plug housing)
		IP rating	IP20*1

*1 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.


9. STRUCTURAL DRAWING

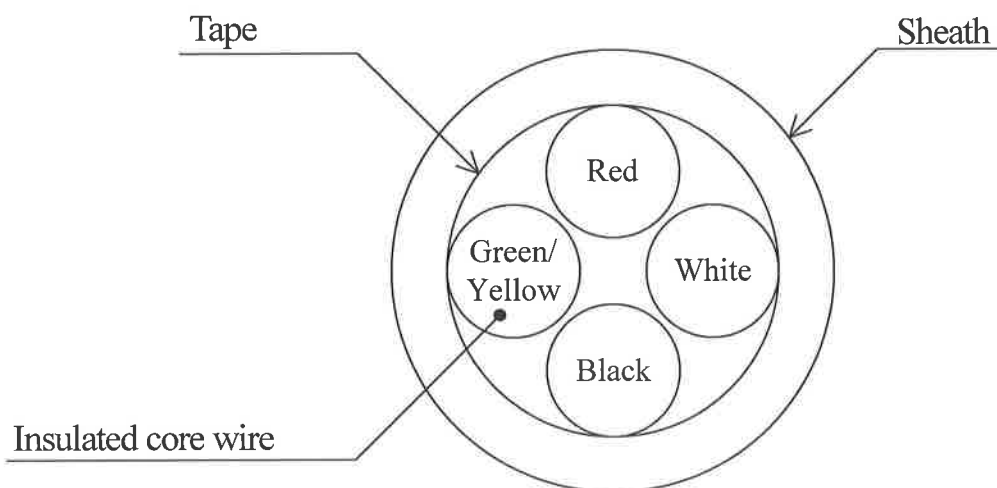

10. OUTLINE DRAWING

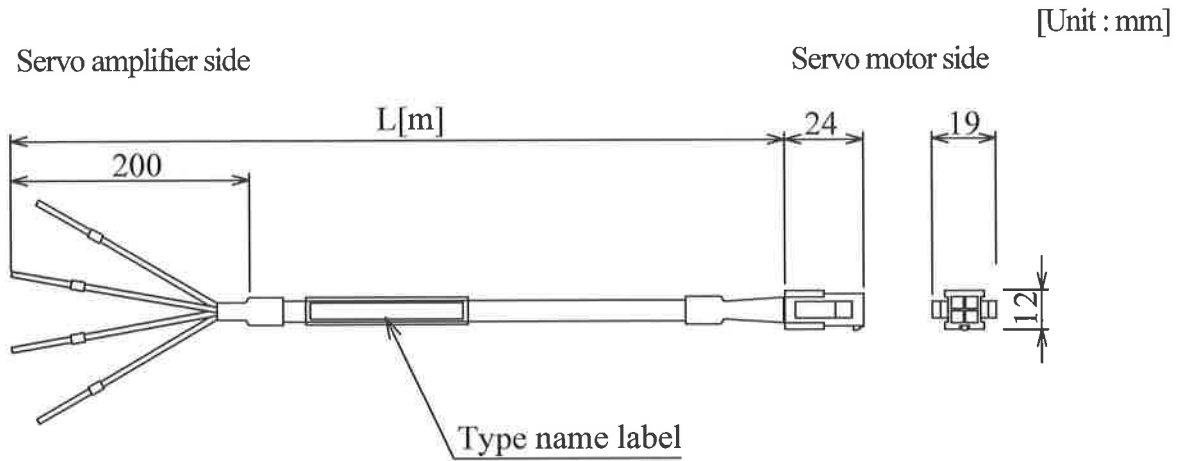

11. SYSTEM CONFIGURATION DIAGRAM

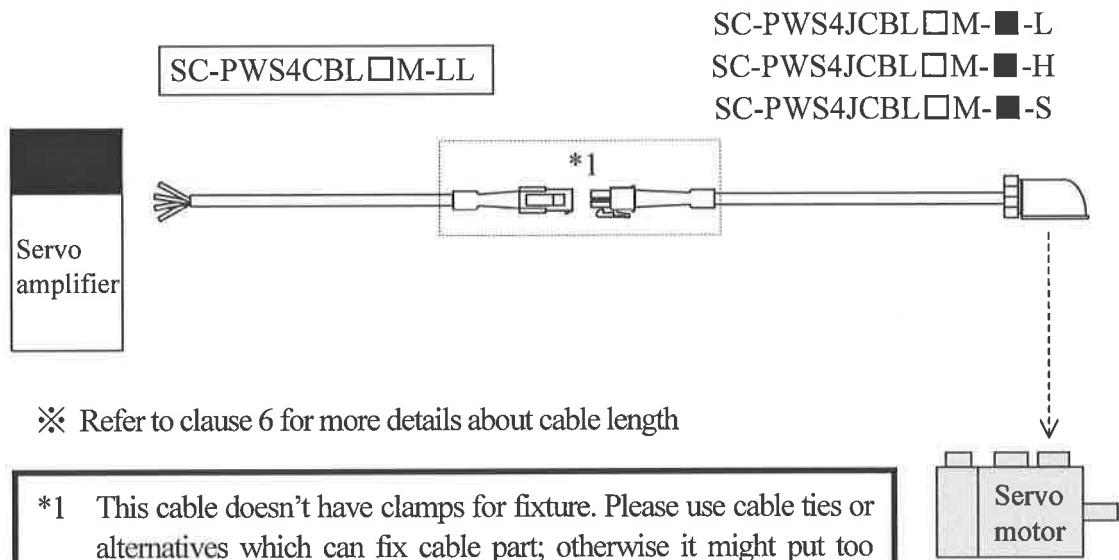

※ Refer to clause 6 for more details about cable length

*1 This cable doesn't have clamps for fixture. Please use cable ties or alternatives which can fix cable part; otherwise it might put too much stress on cables and cause disconnection.