

Specification
for
General purpose AC Servo
Long Bending Life Power supply cable
with sealed

Type SC-PWS3CBL M- -H

mitsubishi electric
system & service co.,ltd

Note

Revision				Drawn	Check	Design	Approved
A	8 Jun.,2018			<i>N. Ishii</i>	<i>S. Kuroya</i>	<i>M. Awanura</i>	<i>D. Gubeshima</i>
Send to				Date		Dwg	
				27 Apr.,2016		X903703D50052-F28A	
				Order			

1. SCOPE

This specification covers the requirements for the General purpose AC Servo Long Bending Life Power supply cable with sealed.

- SC-PWS3CBL□M-■-H

※ The Products covered in this specification don't include the toxic substances in RoHS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBDE, PBB).

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

SC - PWS3 CBL □ M - ■ - H

Sign	Bending life	
	H	Long bending life
Sign	Cable lead out direction	
	A1	Motor shaft side
	A2	Opposite of motor shaft
Sign	Length of cable	
	□	Refer to clause 5.
Sign	Application	
	PWS3	Power supply cable with sealed ※ Refer to clause 4 for applicable motor

3. APPLICABLE STANDARDS

UL758 AWM STYLE 2103 (wire part)

4. APPLICABLE SERVO MOTOR

HG-KR, HG-MR series motor

HF-KN, HF-KP, HF-MP series motor

5. LENGTH OF CABLE

1 to 10m Specified by 1m unit

6. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-PWS3CBL□M-■-H ×××××××

- ※ □ is a figure from 1 to 10.
- ※ ■ is cable lead out direction from A1, A2.
- ※ ××××××× are the serial number for seven digits.


7. STRUCTURE AND CHARACTERISTICS

Item		Unit	Specification
Structure		—	AWG19×4C
Conductor	Conductor size	—	AWG19
	Outer diameter	mm	Approx. 1.24
Insulation	Material	—	ETFE
	Outer diameter	mm	Approx. 1.74
Twisted pair	Number of insulated core wire	—	4C
Drain wire	Material		Tin coated copper
Shield	Material		Tin coated copper braid
Sheath	Material	—	Flame resisting PVC
	color	—	Black
Overall diameter		mm	Approx. 7.5
Electrical characteristics	Insulation resistance	MΩ · km	Over 100
	Withstand voltage	V/for 1min	AC1500
Operating temperature range		°C	-10~+60 (without condensation)
Minimum bend radius		mm	6 times the overall diameter
Bending life		—	Over 1 million times ^{*1} (Bend radius: Minimum bend radius)
Flame retardant		—	UL1581 VW-1
Connector	Servo amplifier side		—
	Servo motor side	Type	Japan Aviation Electronics Industry, Limited JN4FT04SJ4-R (Angle plug)
		IP rating	IP65 ^{*2}


*1 It is a test outcome, and not a guaranteed value. (The performance is different according to customer's environment.)

*2 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

8. STRUCTURAL DRAWING

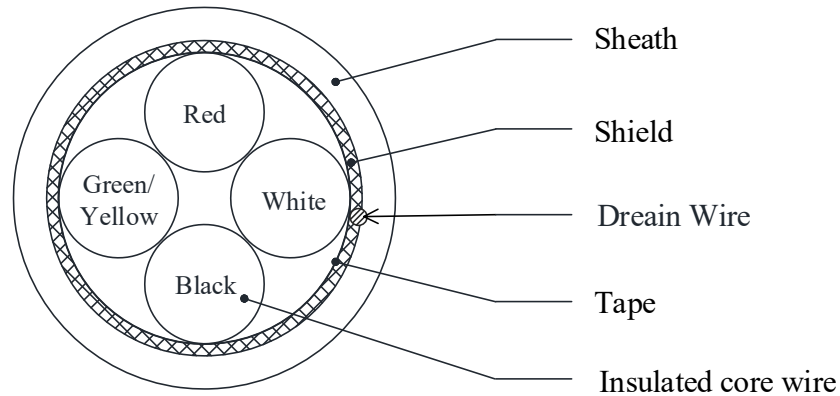

9. OUTLINE DRAWING

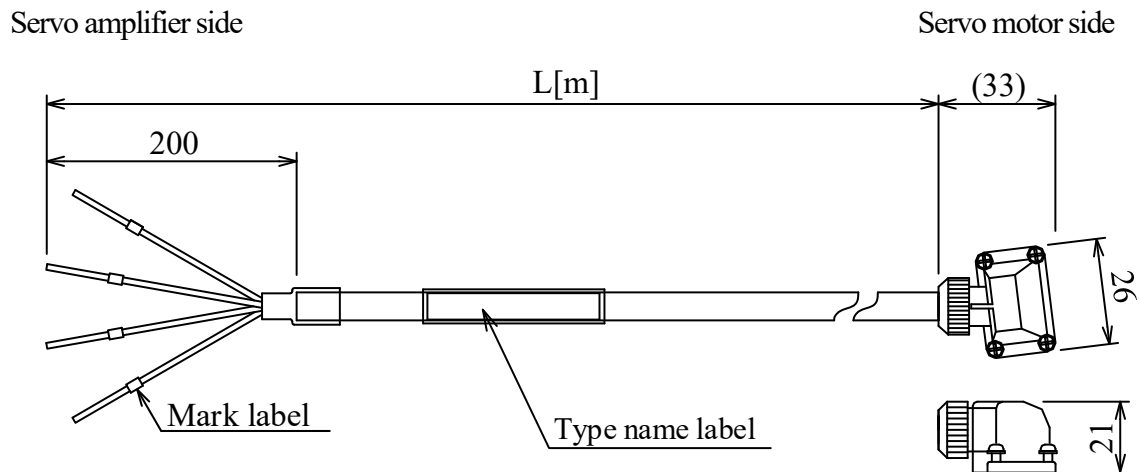

Refer to the following table for mark label and insulation color.

Mark label	Insulation color
U	Red
V	White
W	Black
E	Green / Yellow