

1. SCOPE

This specification covers the requirements for the General purpose AC Servo Long Bending Life Power supply cable with electromagnetic brake.


• SC-PWBKC2CBL□M-■-H

※ The Products covered in this specification don't include the toxic substances in RoHS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBDE, PBB).


※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

SC - PWBK C2 CBL □ M - ■ - H

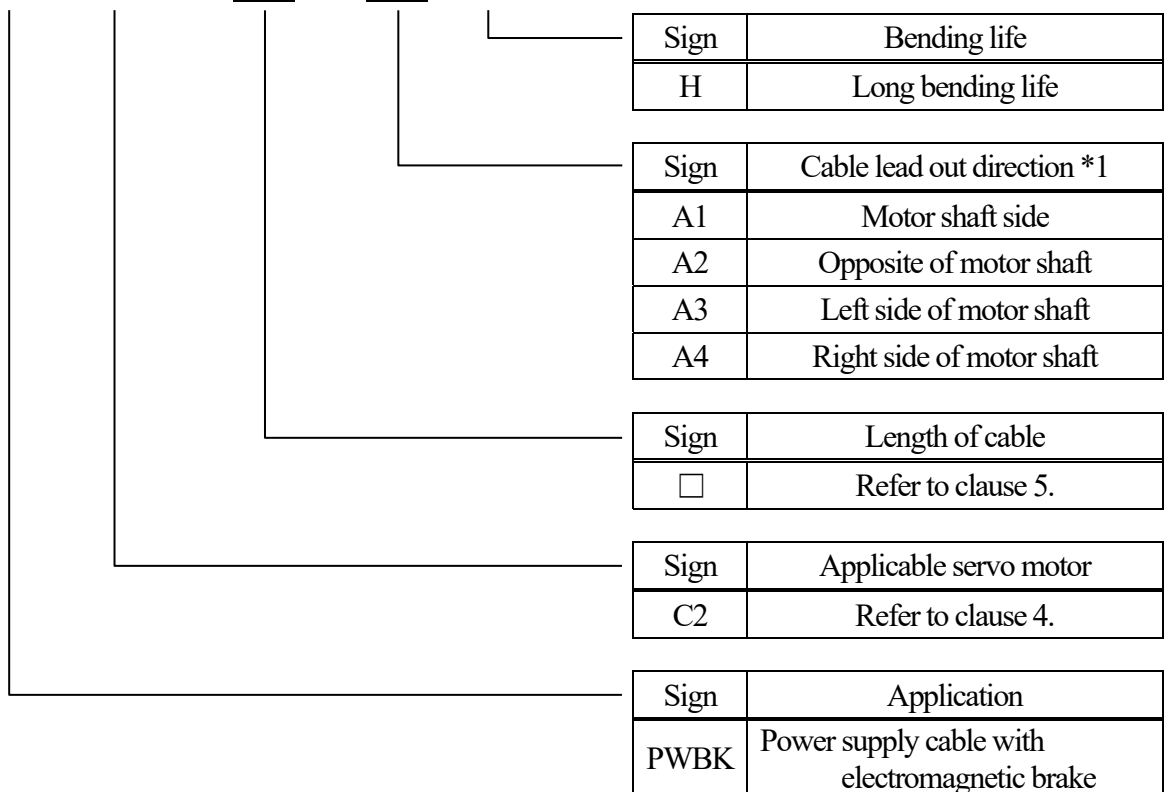

*1 : Cable lead out direction (View from cable insertion direction)

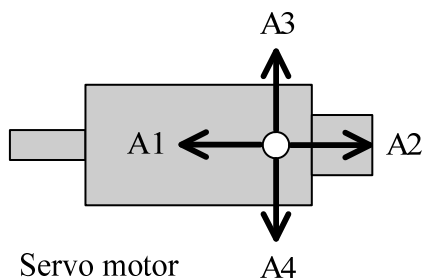

- A1 : Motor shaft side
- A2 : Opposite of motor shaft
- A3 : Left side of motor shaft
- A4 : Right side of motor shaft

(Note) Depending on the situation such as installation environment or combination of cables and connectors, there is a chance not to complete installation. (Even though it's mentioned above) Please make sure the cable lead out direction before your purchase.

3. APPLICABLE STANDARDS

UL758 AWM STYLE 2586 (wire part)

4. APPLICABLE SERVO MOTOR

HG-RR353B, 503B motor

HC-RP353B, 503B motor

5. LENGTH OF CABLE

1 to 30m Specified by 1m unit

6. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-PWBKC2CBL□M-■-H ×××××××

※ □ is a figure from 1 to 30.

※ ■ is cable lead out direction from A1, A2, A3, A4.

※ ××××××× are the serial number for seven digits.


7. STRUCTURE AND CHARACTERISTICS

Item		Unit	Specification
Structure		—	AWG10×6C
Conductor	Conductor size	—	AWG10
	Outer diameter	mm	Approx. 2.99
Insulation	Material	—	PVC
	Outer diameter	mm	Approx. 4.96
Twisted pair	Number of insulated core wire	—	6C
Sheath	Material	—	Flame resisting PVC
	color	—	Black
Overall diameter		mm	Approx. 17
Electrical characteristics	Insulation resistance	MΩ · km	Over 10
	Withstand voltage	V/for 1min	AC2000
Operating temperature range		°C	-10~+60 (without condensation)
Minimum bend radius		mm	6 times the overall diameter
Bending life		—	Over 1 million times ^{*1} (Bend radius: Minimum bend radius)
Flame retardant		—	UL1581 VW-1
Connector	Servo amplifier side		—
	Servo motor side	Type	DDK Ltd. CE05-8A24-10SD-D-BAS (Angle plug) CE3057-16A-1-D (Waterproof cable clamp)
		IP rating	IP67 ^{*2}


*1 It is a test outcome, and not a guaranteed value. (The performance is different according to customer's environment.)

*2 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

8. STRUCTURAL DRAWING

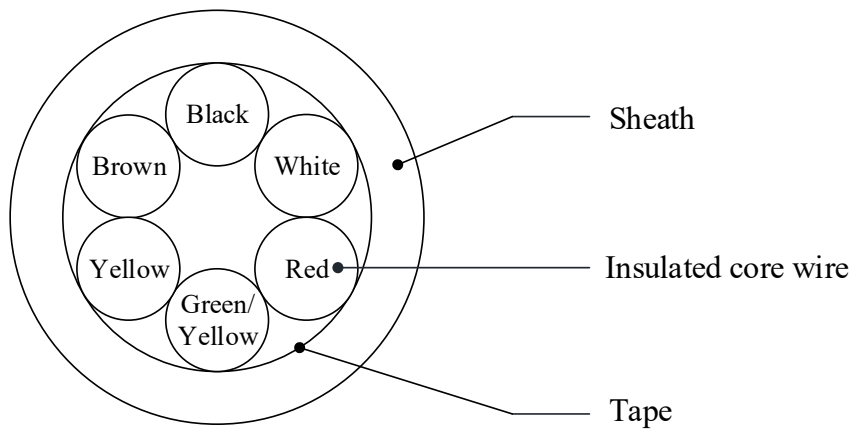

9. OUTLINE DRAWING

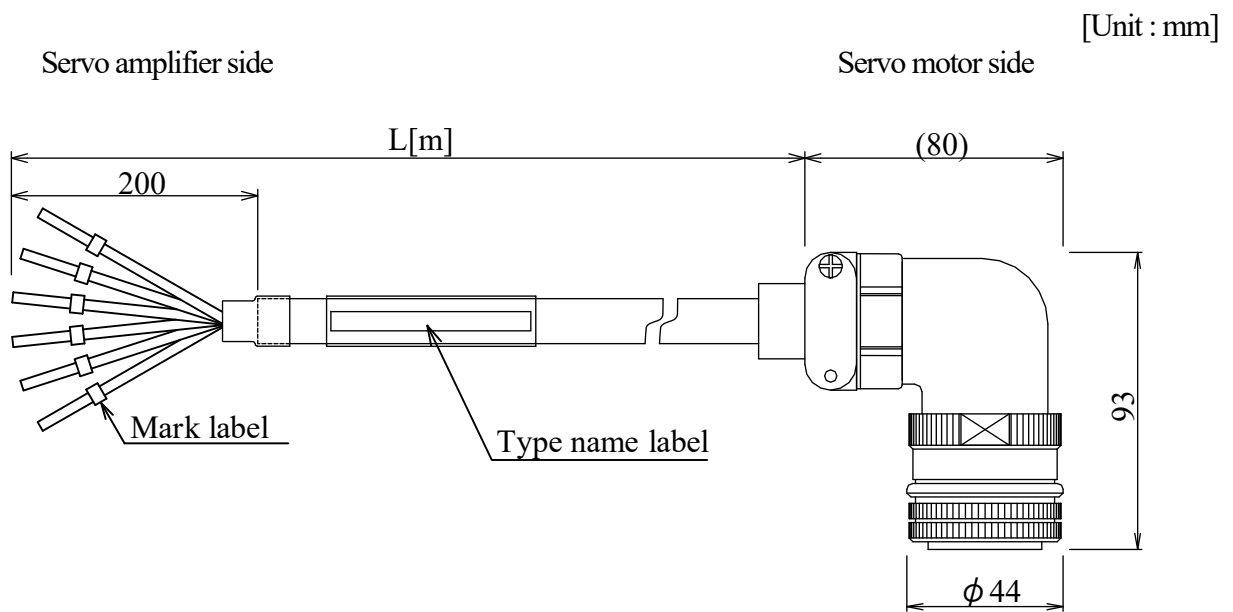

Refer to the following table for mark label and insulation color.

Mark label	Insulation color
U	Red
V	White
W	Black
E	Green / Yellow
B1	Yellow
B2	Brown