

Specification
for
Optical Fiber Cable
Assemblies
for CC-Link IE Controller network

Type QG-DL

mitsubishi electric system & service co.,ltd.

Note

Revision				Drawn	Check	Design	Approved
A	9 Nov., 2021	D	26 Jan., 2023	<i>N.Ishii</i>	<i>S.Kariya</i>	<i>M.Edatsugi</i>	<i>D.Fukushima</i>
B	6 Jul., 2022						
C	11 Nov., 2022						
Send to				Date		Dwg	
				9 Sep., 2020		X903703D50018-H07D	
				Order			

1. SCOPE

This specification covers the requirements for the optical cable assemblies type QG-DL for CC-Link IE.

※ The Products covered in this specification don't include the toxic substances in RoHS2.

2. USE ENVIRONMENT

The cable shall be used in following conditions.

Indoor

- ① Indoor pipe
- ② Rack
- ③ Duct
- ⑤ Free access
- ④ Control box ※¹

※¹ Allowed if bending radius and storage space allow.

Outdoor

- ① Pipe (underground)
- ① Rack
- ③ Trough
- ④ Overhead wires ※²
- ⑤ Submerged environment ※³

※² Possible if a separate support wire is attached and the cable is routed and fixed.

※³ Submergence and temporary submersion are possible. (permanently submerged in rivers, tanks, etc.)

3. LENGTH OF CABLE

The maximum length of the cable is two kilometer.

(The maximum length of the cable with connector is 550 meters.)

4. CABLE TYPE

■For with connector

QG - G50 - nC - □M - DL - ○
 (1) (2) (3) (4) (5) (6)

■For cable only

QG - G50 - nC - DL □m
 (1) (2) (3) (5) (4)

(1) Cable series name	Optical cable for CC-Link IE
(2) Type of optical fiber cord	G50:Core diameter 50 μ m GI optical fiber
(3) Number of Optical Fiber	n=2: 2 cores n=4: 4 cores n=6: 6 cores n=8: 8 cores
(4) Length of cable	□ : 2~2000 (Cable only) 2~550 (With connector)
(5) Cable type	Outdoor strengthen type (LAP sheath)
(6) Applicable connector	LL: LC duplex connectors on both sides LS: LC duplex connector on one side - SC connector on one side LF: LC duplex connector on one side - FC connector on one side LN: LC duplex connector on one side - no connector on one side ※4 SS: SC connectors on both sides FF: FC connectors on both sides SF: SC connector on one side - FC connector on one side

※4 : After processing the connectors on both ends, the loss is measured and the connector on one end is cut.

5. CORD CONSTRUCTION

The construction of the optical fiber cord shall be in accordance with Table 1.

Table 1. Cord construction

No.	Item	Construction				
①	Type	GI optical fiber (multi mode)				
	Conforming Standard	IEC60793-2-10 A1a.1				
	Core	Materials	Silica Glass			
		Diameter	50 \pm 3 μ m			
	Cladding	Materials	Silica Glass			
		Diameter	125 \pm 2 μ m			
	Protective Coating	Materials	Zero Halogen			
		Diameter	0.9 \pm 0.1mm			
	Identification	See Fig.1				
	Sheath	Materials	PVC (Orange)			
		Diameter	2.0 \pm 0.2mm			
			Min	Max	Unit	Conditions
		Maximum Tensile Load	—	60	N	By careless handling (short term)
	Minimum Radius Bend	15	—	mm	After careless handling	

6. OPTICAL CHARACTERISTICS

The optical characteristics is listed in Table 2.

Table 2. Optical characteristics

Items	Construction
Attenuation	3.0dB/km or under [$\lambda=850\text{nm}$]
	1.0dB/km or under [$\lambda=1300\text{nm}$]
Bandwidth	500MHz · km or over [$\lambda=850\text{nm}$]
	500MHz · km or over [$\lambda=1300\text{nm}$]

7. OPTICAL CONNECTOR CONSTRUCTION

Table 3. Optical connector construction

Item	Specification		
Product name	LC duplex connector	SC connector	FC connector
Type of optical connector	DLCF-G50-D2	DSC-G50-D2	DFC-G50-D2
Standard	IEC61754-20	IEC61754-4	IEC61754-13
Connection loss (in respect to master fiber)	0.3dB or less		
Polishing method of connector	PC polish		
Operating Temperature	-40~+85°C		
Connection method	Cross connection (Connect the A side connector on one end to the B side connector on the other side) ※5		

※5 For LC duplex connectors on both sides.

8. CABLE CONSTRUCTION

The construction of the optical fiber cable shall be in accordance with Table4.

Table 4. Cable construction

No.	Item	Construction				
①	Type of optical fiber cord	See Table 1.				
②	Central Strength Member	Material	Rust prevention steel wire (2cores,4cores) PE rust prevention steel wire (6cores,8cores)			
		Diameter	1.0mm (2cores,4cores) 1.6mm(6cores,8cores)			
③	Filler Cord	Plastic Cord				
④	Tape	Plastic				
⑤	Sheath	LAP Sheath (Black)				
	Cable Diameter	10.0mm (2,4cores) 11.0mm(6cores) 12.0mm(8cores)				
	Approximate Net Weight	75kg/km(2,4cores) 100 kg/km(6cores) 120 kg/km(8cores)				
		Min	Max	Unit	Conditions	
	Operating Temperature	-20	60	°C	—	
	Maximum Tensile Load ※6	—	420	N	2cores	By careless handling (short term)
		—	540		4cores	
		—	780		6cores	
		—	780		8cores	
	Minimum Radius Bend	100	—	mm	2,4cores	After careless handling
		110	—		6cores	
		120	—		8cores	
	Crush Resistance	—	980	N/50mm	By careless handling (short term)	

※6 When tension is applied to the central tension member.

9. MARKING

The optical cable shall be printed following marking format on the one side of sheath by regular interval.

- Marking content : CC-Link IE OPTICAL FIBER CABLE QG-G50-nC-DL
- Marking pitch : 1000mm
- Marking color : White



n: Number of Optical Fiber(n=2, 4, 6, 8)

Fig.1 Marking of Optical Fiber Cord

※ Please acknowledge it though the print display might rub when transporting, and careless handling it and it disappear.

10. CONSTRUCTION FIGURE

QG-DL (2 Cores)

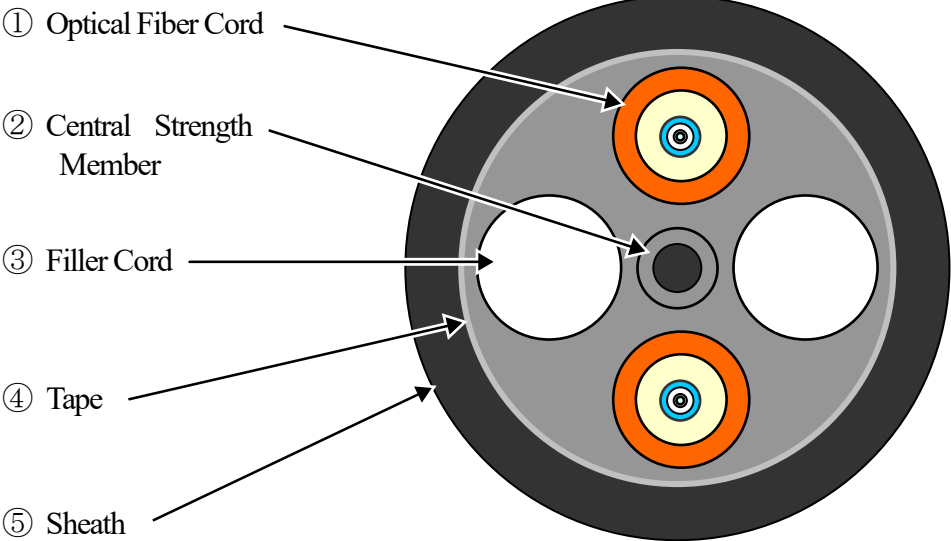


Fig.2 Construction of Optical Fiber Cable

QG-DL (4 Cores)

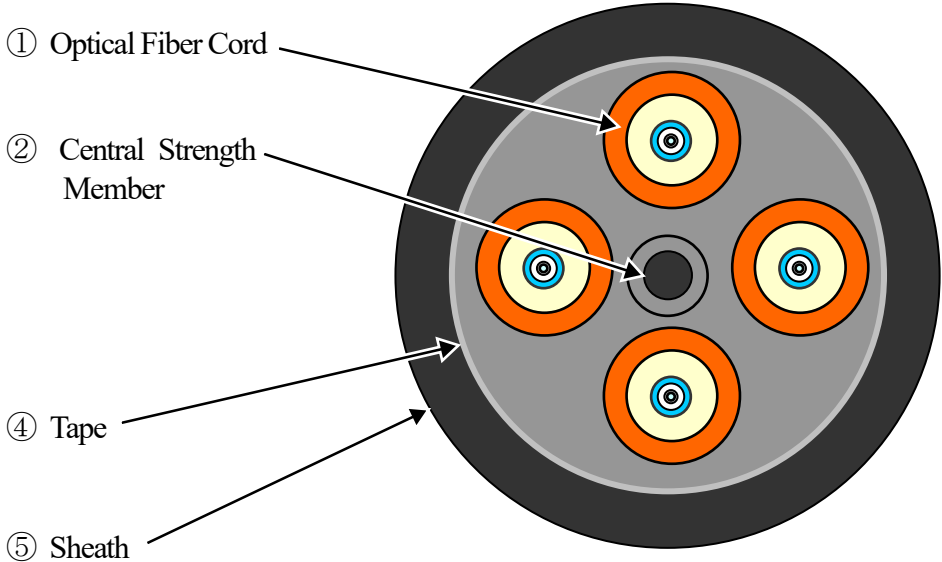


Fig.3 Construction of Optical Fiber Cable

QG-DL (6 Cores)

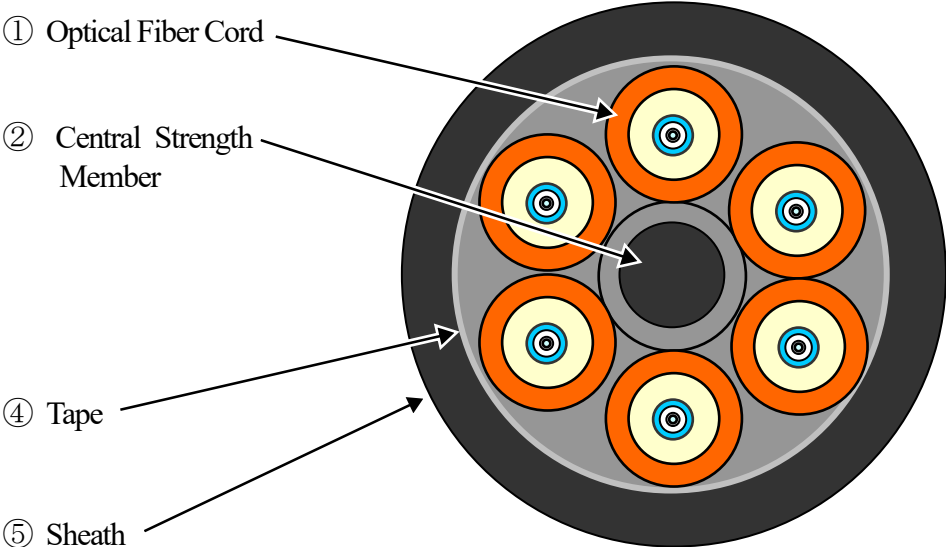


Fig.4 Construction of Optical Fiber Cable

QG-DL (8 Cores)


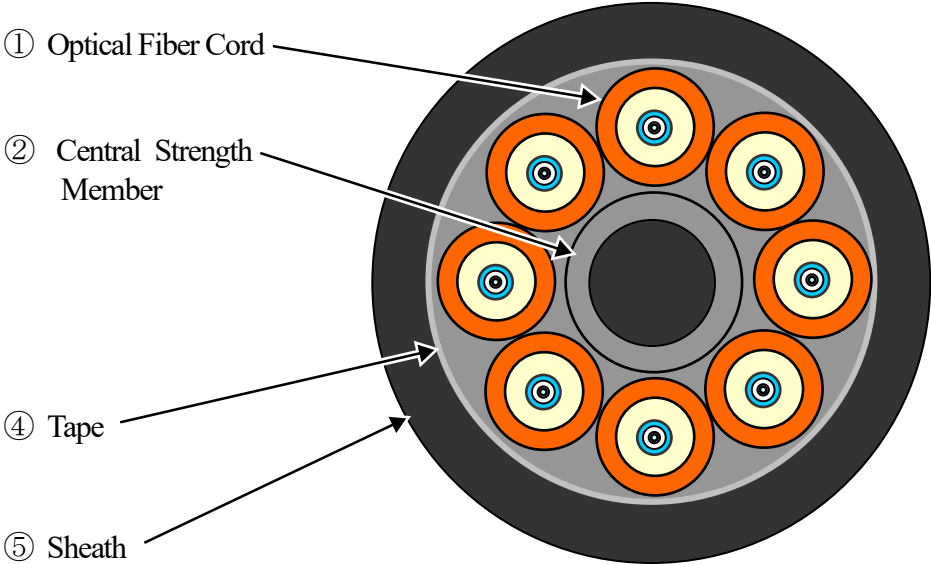


Fig.5 Construction of Optical Fiber Cable

11. CONFIGURATION


[LCF connectors on both sides]

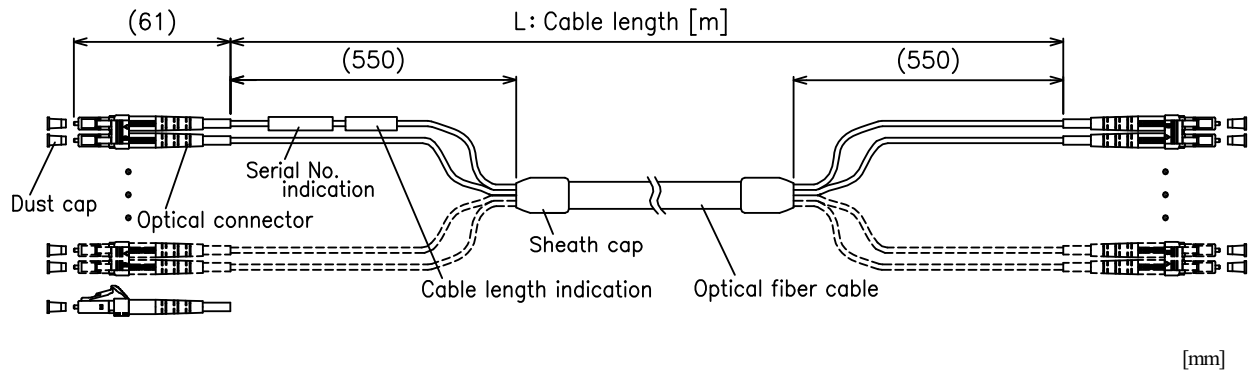

Optical Fiber Identification : Marking of figure on the cord Number of cords : n (n=2, 4, 6, 8)

Fig 6. Configuration of Optical Fiber Cable


[SC connectors on both sides]

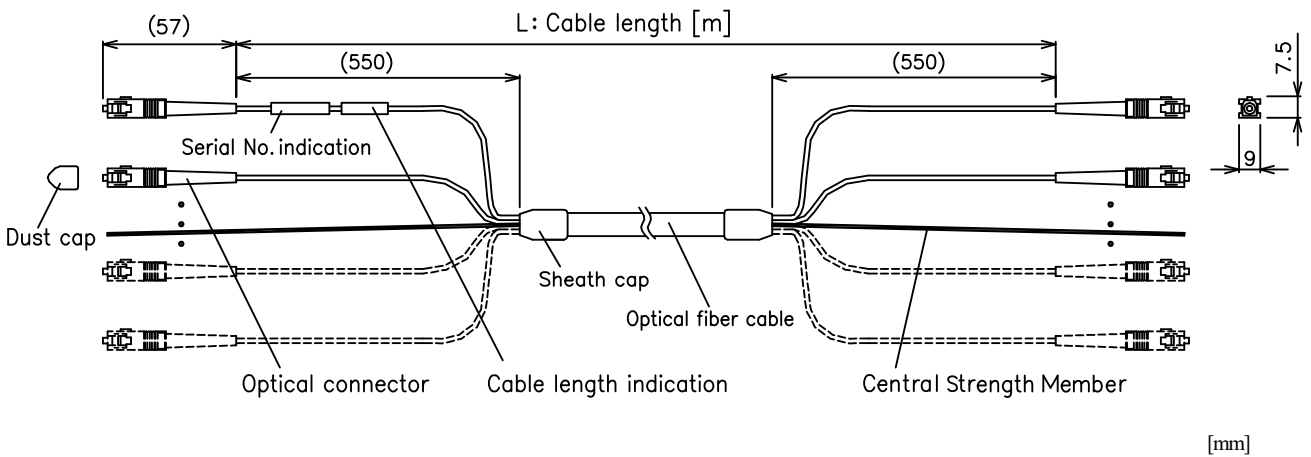

Optical Fiber Identification : Marking of figure on the cord Number of cords : n (n=2, 4, 6, 8)

Fig 7. Configuration of Optical Fiber Cable

[FC connectors on both sides]

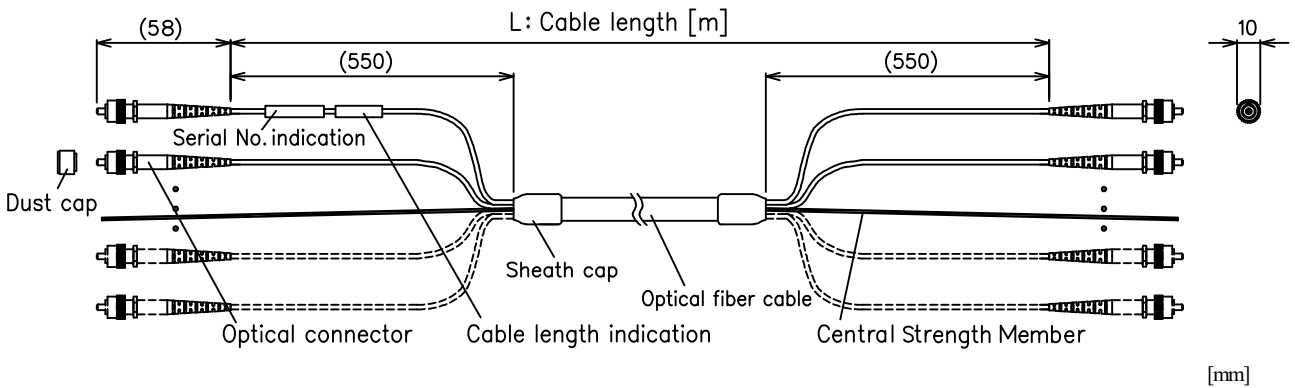


Optical Fiber Identification : Marking of figure on the cord Number of cords : n (n=2, 4, 6, 8)

Fig 8. Configuration of Optical Fiber Cable

12. OTHERS

Protective holder

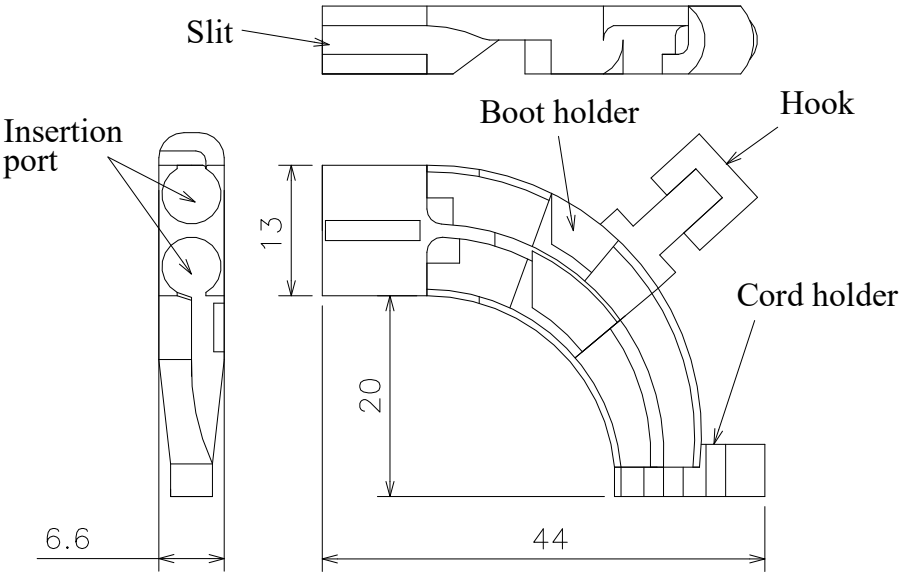

Item	Specification
Applicable optical fiber cable	QG Series
Applicable connector	LC duplex connector (DLCF-G50-D2)
Materials	PC (Black)
Operating Temperature	-20~+60°C

Note) Never mount this product onto connector other than the Mitsubishi connector or use a damaged protective holder. Failure to observe this could result in damage or increased losses.