



CORNING

No Polish LC JG1 Connector for 1.6-2 mm cable

8832-JG1 UPC SM

6832-50/OM2-JG1 MM

6832-50/OM4-JG1 MM

Instructions

Safety Precautions

Protective Eyewear

⚠ CAUTION

To reduce the risk associated with eye injury:
- Safety glasses should be worn when handling chemicals and cleaving the optical fiber.

Chemical Precautions

⚠ WARNING

To reduce the risk associated with fire:
- Storage, use and disposal of isopropyl alcohol should be per your company health, safety and environmental instructions. Refer to material safety data sheet for health hazards, safe handling, proper use and control measures.

⚠ CAUTION

To reduce the risk associated with eye or skin irritation from fiber gel in connector:
- Product contains phenylmethyl silicone (63148-58-3), hydrophobic silica (68611-44-9) and may cause minimal eye irritation. Avoid contact with eyes and wash hands before eating or smoking. Upon eye contact, immediately flush eyes with water while holding eyelids open and continue flushing for ten minutes. Contact a physician. Upon skin contact, wash with soap and water. Refer to Safety Data Sheet for product information

Bare Fiber Handling

⚠ CAUTION

To reduce the risk associated with handling sharp glass fibers:
- Cleaved glass fibers are sharp and can pierce the skin. Use tweezers when handling shards and dispose of them properly per your company health and safety instructions.

Fiber/Cable Handling

NOTICE

To reduce the risk associated with fiber damage:
- Optical fiber can be damaged by excessive tensile, compressive and bending forces. Consult the manufactures' specifications for proper handling instructions.


LASER Safety

⚠ CAUTION

To reduce the risk associated with eye damage from exposure to laser light:
- Take the proper precautions when working with optical fiber because invisible laser light may be present. The principal laser hazard when working with fiber optics is injury to the eye. Never look directly into the fiber or connector using the naked eye or a microscope.

1.0 Overview

1.1 No Polish Connectors 8832-JG1 & 6832-JG1 terminate 1.6mm and 2.0mm jacket cable.

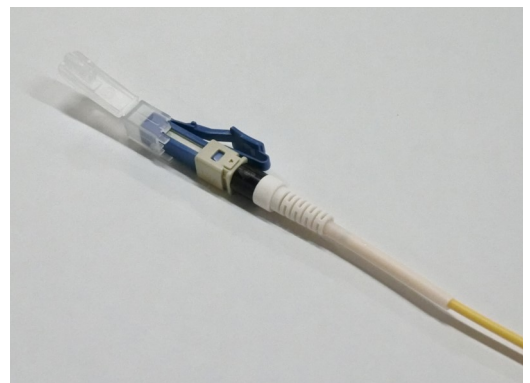


1.2 Materials required for connector termination

You will find following components in a box of connectors.

- A. LC No Polish Connector 8832-JG1/6832-JG1
- B. Boot
- C. Cable holder
- D. Disposable stripper (for 250um coating removal only, up to 20 stripping)

Note: content may vary depending on product you purchased

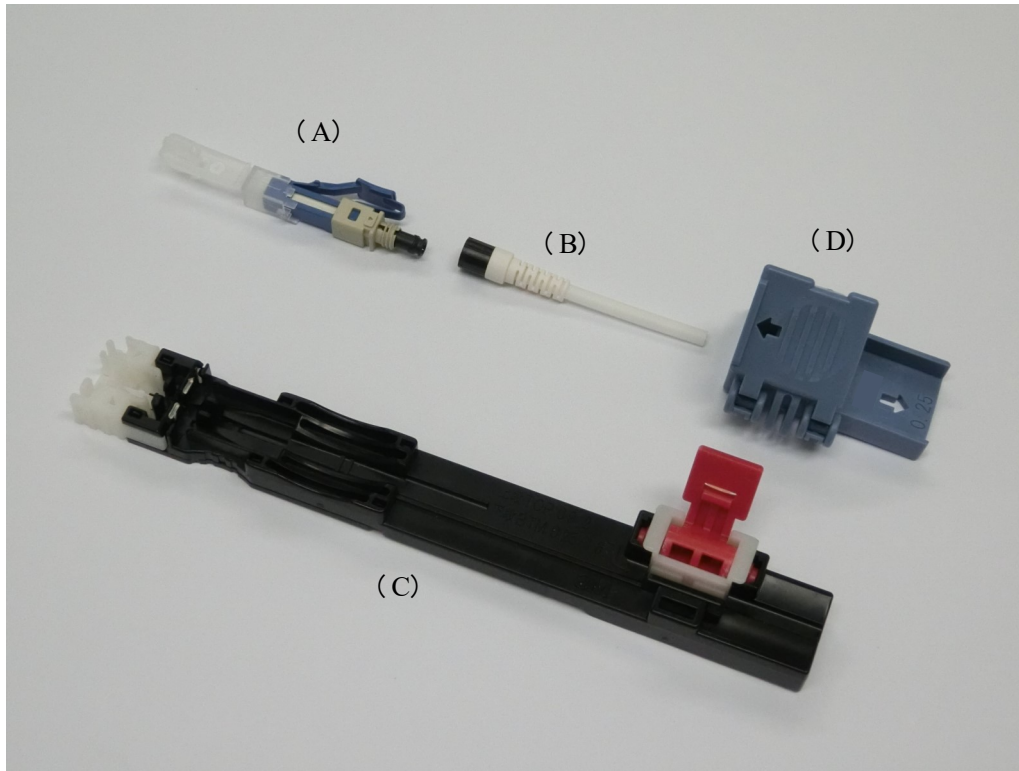

Other tools

- F. Fiber cleaver
- G. Fiber Stripper
- H. Alcohol
- I. Lint-free wipe
- J. Snips


Note: Carefully follow safety, health and environmental information given on product labels or the Safety Data Sheets for isopropyl alcohol, fiber optic cleaning solution.

LC No Polish Connector 8832-50/OM4-JG1 is a CC-Link IE certified field mount optical fiber connector.



CC-Link IE Control

2.0 Termination process



2.1 Put connector boot on cable

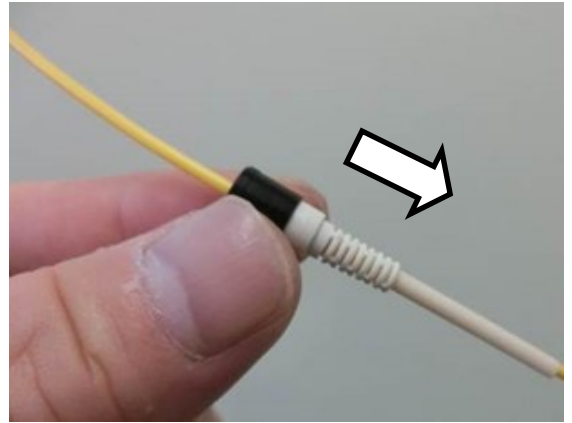


2.2 Remove cable jacket 50mm from the cable end. Cable holder can be used to measure the length. Align the end of cable to the double line on the cable holder to measure 50mm.

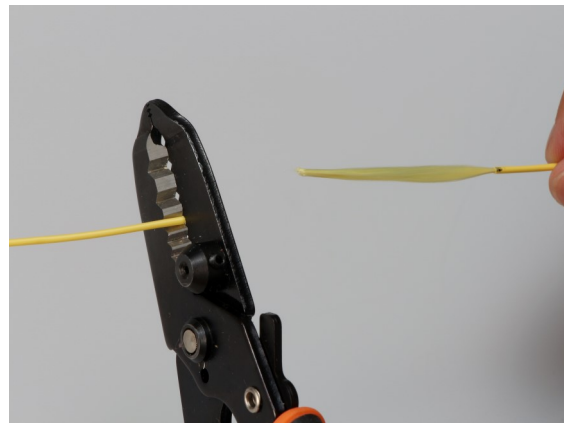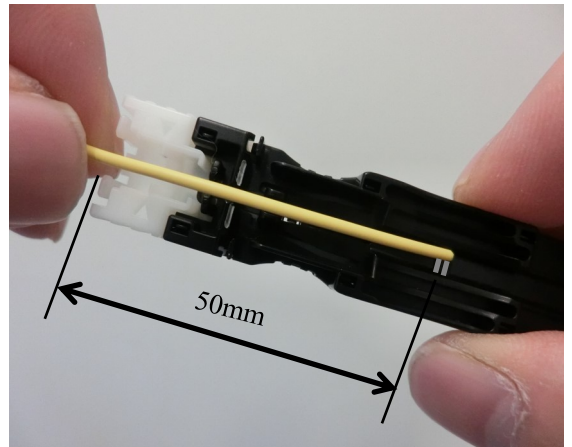

2.3 Butt up jacket end against the stop on the cable holder as shown. Group aramid yarn and insert into one of the slot next to the stop.

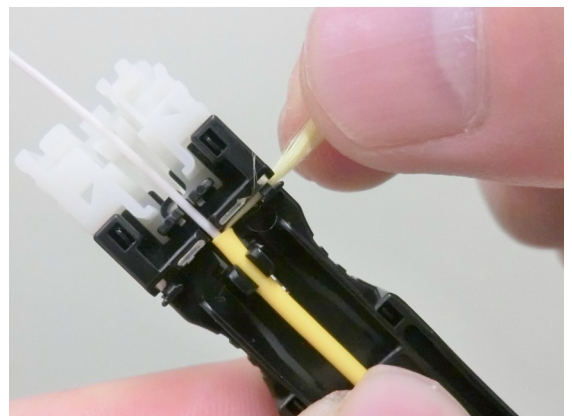
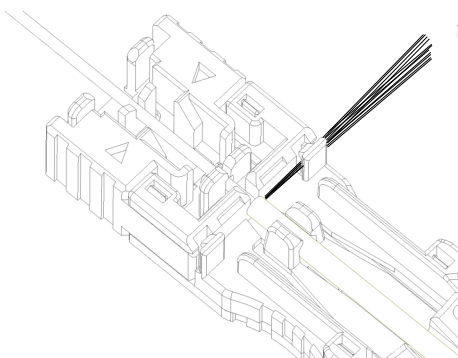


2.4 Lay the cable straight on the cable holder. Place the cable in appropriate position in the clamp depending on fiber type inside cable jacket. And close the cover to clamp cable

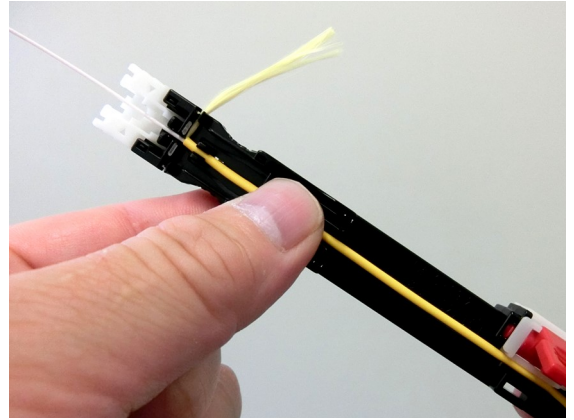


Upper position: cable with 900um coated fiber inside

Lower position: cable with 250um coated fiber inside

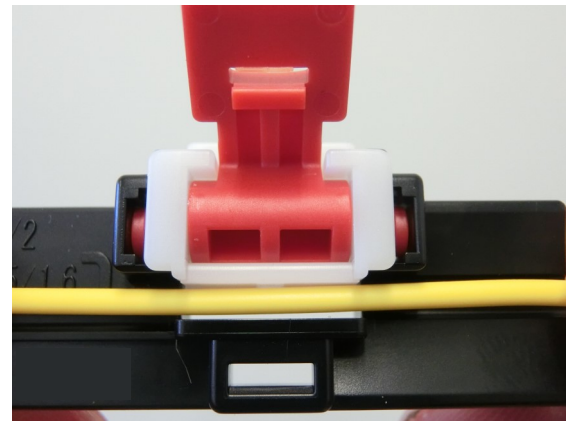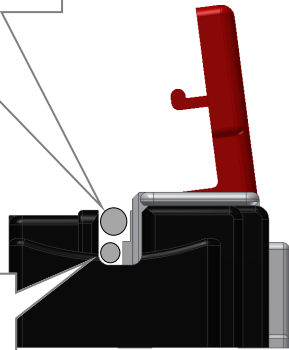


Make sure fiber sit in fiber guide slit in sliding connector or nest.

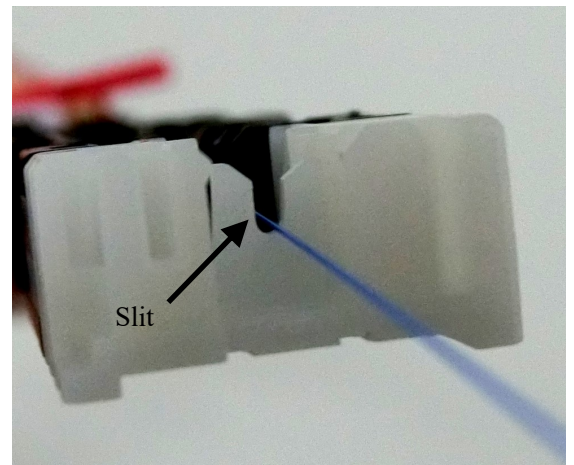


2.5 Fully pull out sliding connector nest from the cable holder. Put marking(s) on the fiber with a marking pen


- 1st marking: at the edge of holder body
- 2nd marking: at the indicator "0.9"
(900um fiber only)

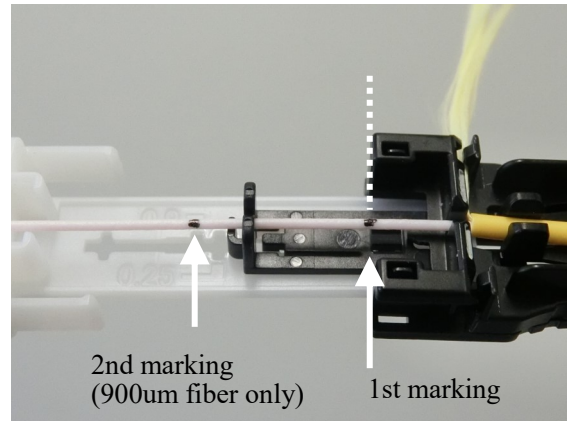

Marking locations for cable with 250µm fiber inside

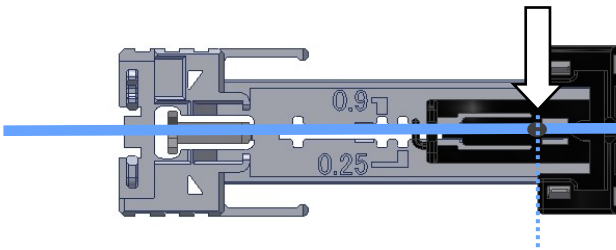


Marking locations for cable with 900µm fiber inside

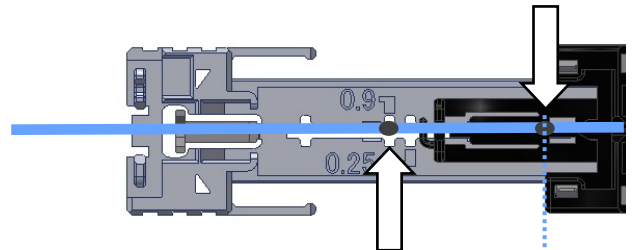

2.6 Bring the sliding nest back to original position. Strip buffer coating using appropriate stripping tool


Stripping 250µm fiber using disposable stripper

Place cable holder on the stripper such that cable holder butt up against the stop. Close the stripper and pull out the cable holder

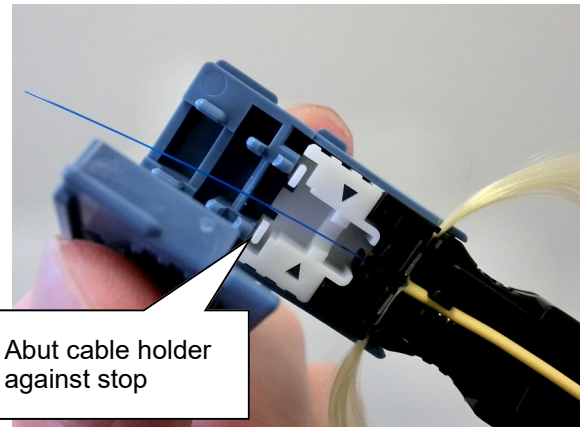



Caution: Do NOT OVERUSE the stripper (up to 20 stripping) or may damage stripped fiber

Caution: Do NOT STRIP the same fiber twice or may damage the stripped fiber.

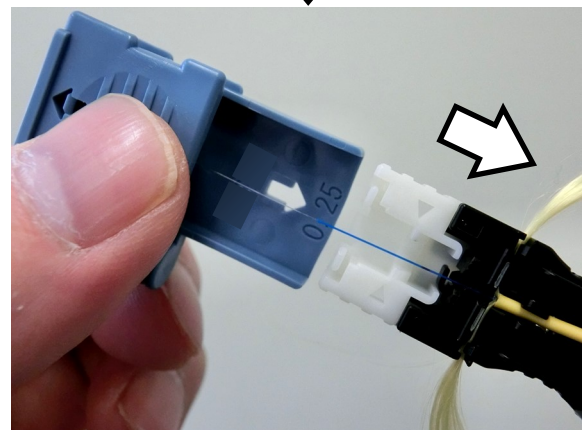


Stripping 900 μ m fiber

Remove coating at the 2nd marking and outward with appropriate stripping tool.

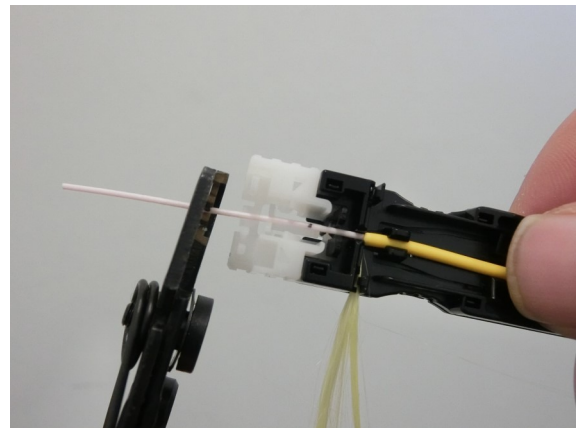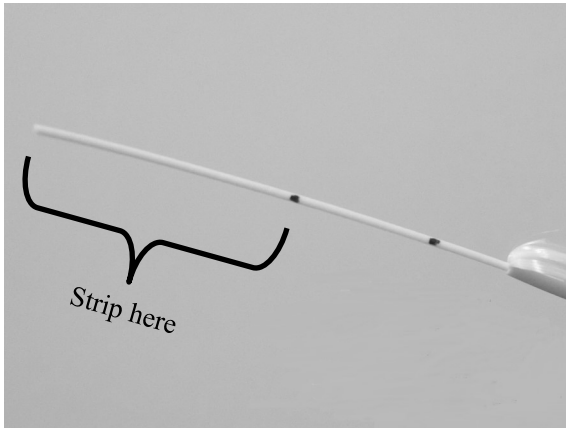


2.7 Thoroughly clean the stripped fiber with a lint-free wipe and alcohol or cleaning fluid.

2.8 Test the stripped fiber for weak points by using your finger to slowly flick the fiber in multiple directions. Watch for the fiber to spring back to the straight position. If the fiber breaks, properly dispose of broken-off piece and repeat at Step 2.2.

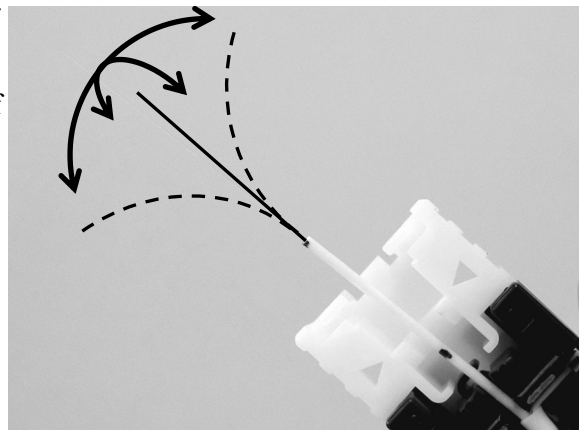


Note: Do not touch bare glass 10mm from buffer end


2.9 Place the cable holder on a cleaver and push it to the stop. Cleave the fiber per cleaver manufacturer's instruction.

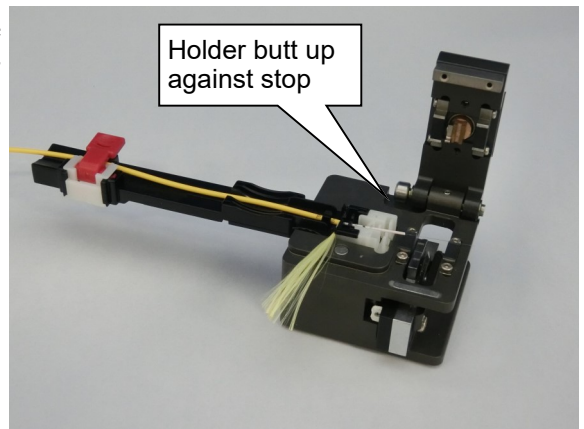


Note: If cleave length gauge is installed on your cleaver, remove the gauge prior to connector installation. Save the cleave length gauge for later use.

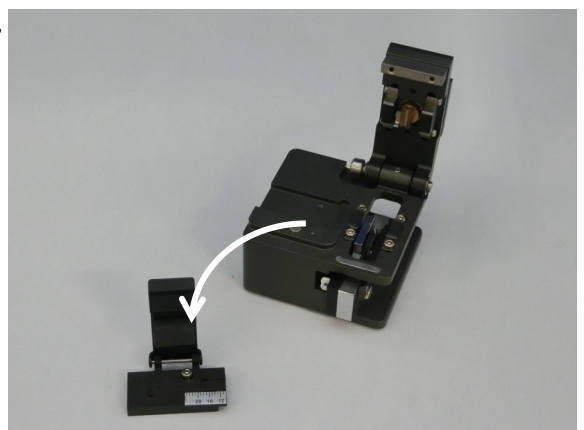


2.10 Check for cleave length and strip length by pulling out sliding connector nest of cable holder.

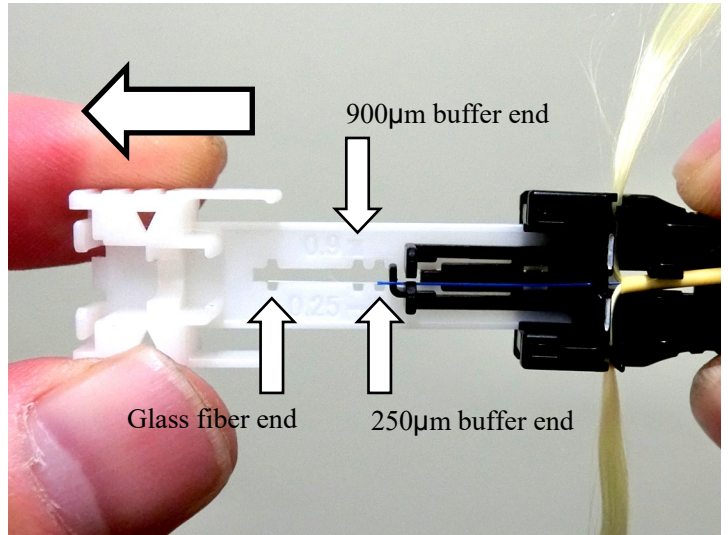


Fiber end/buffer end must be within respective gauge window (900µm buffer shown as example)

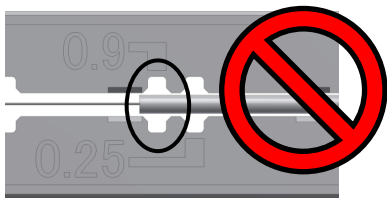

Too short

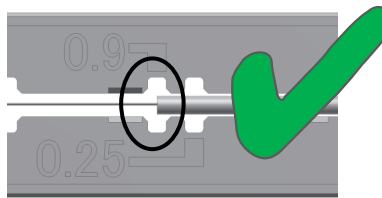


Right length


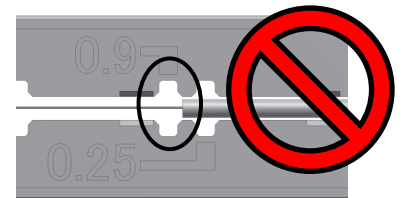


Too long

2.11 Pull out buffer clamp to release buffer

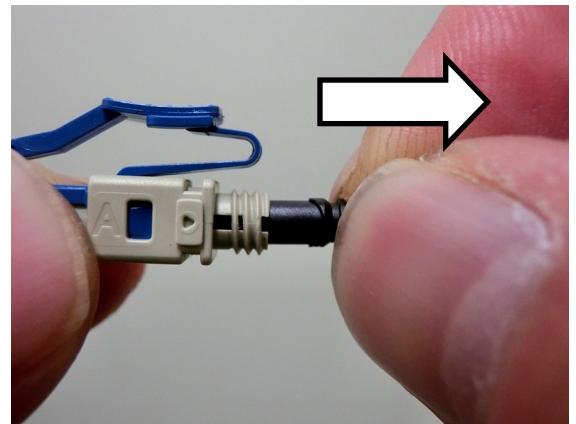


2.12 Remove connector from the plastic bag. Attach the connector to sliding connector nest with splice cap facing up. Pinch side of sliding connector nest to allow fiber guide protrude downward. (see Section 2.13)

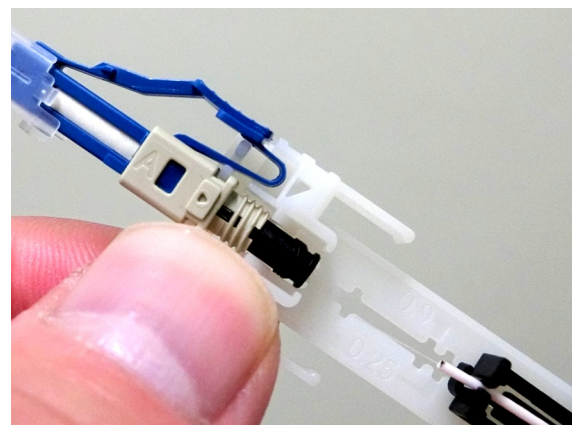
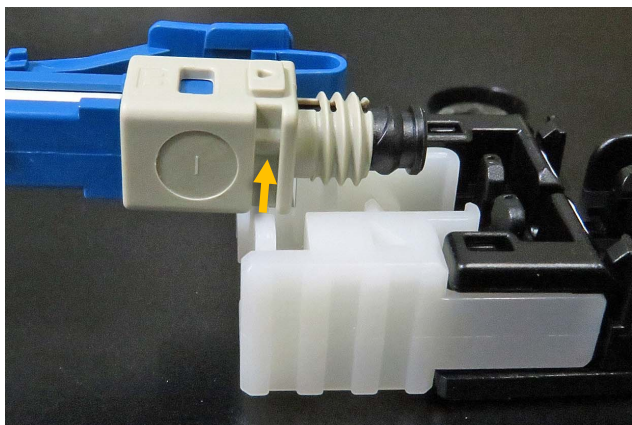


2.13 Be aware of fiber guide protruding downward until splice is actuated

Caution: Do NOT PUSH UP fiber guide or connector may pop out from cable holder

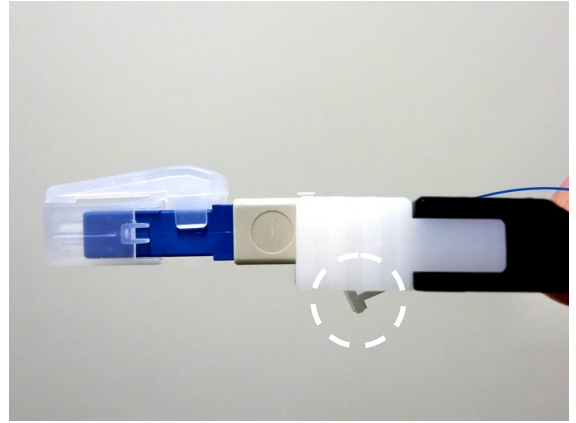


2.14 Check for buffer clamp. If the clamp is partially actuated, remove the connector and repeat at Section 2.12

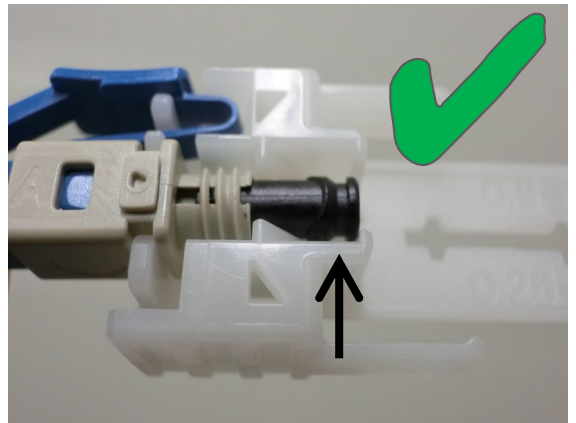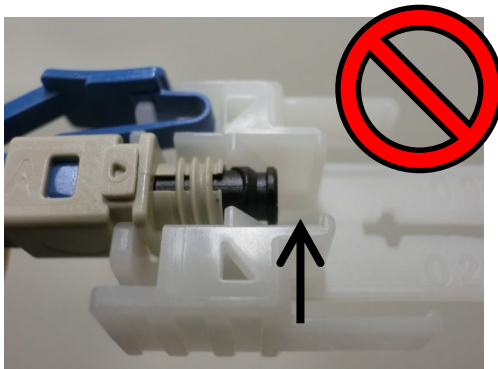


2.15 Hold the cable holder by both sides. SLOWLY slide back the connector to insert fiber into the connector.

Caution: Do NOT TOUCH CABLE until splice is actuated at Section 2.17.

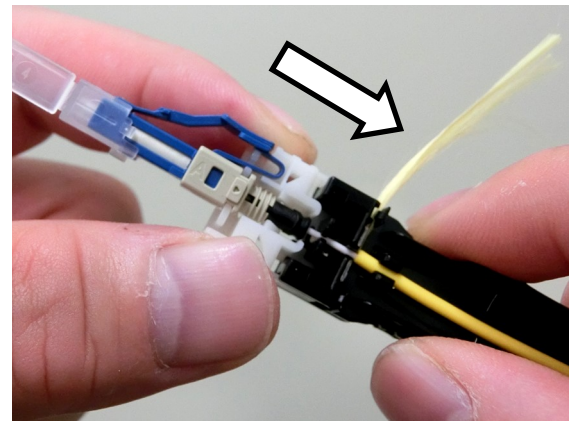


2.16 Check for marking on buffer at the end of buffer clamp.


If marking is not at this position, pull out the sliding head and check for fiber length again per Section 2.10. And insert fiber again per Section 2.15

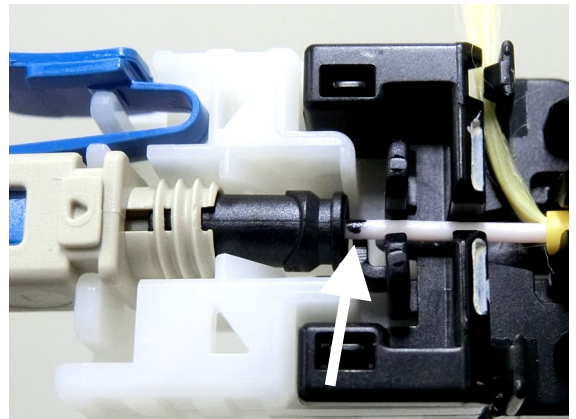


2.17 Flip back actuation lever on the dust cap and fully press down the lever

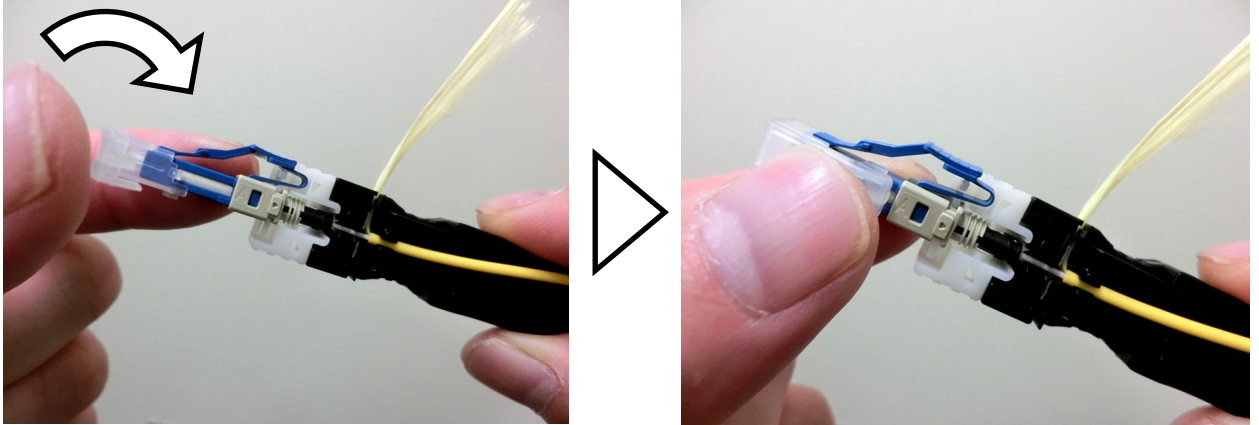


2.18 Check if cap is fully actuated. If not, press down lever again

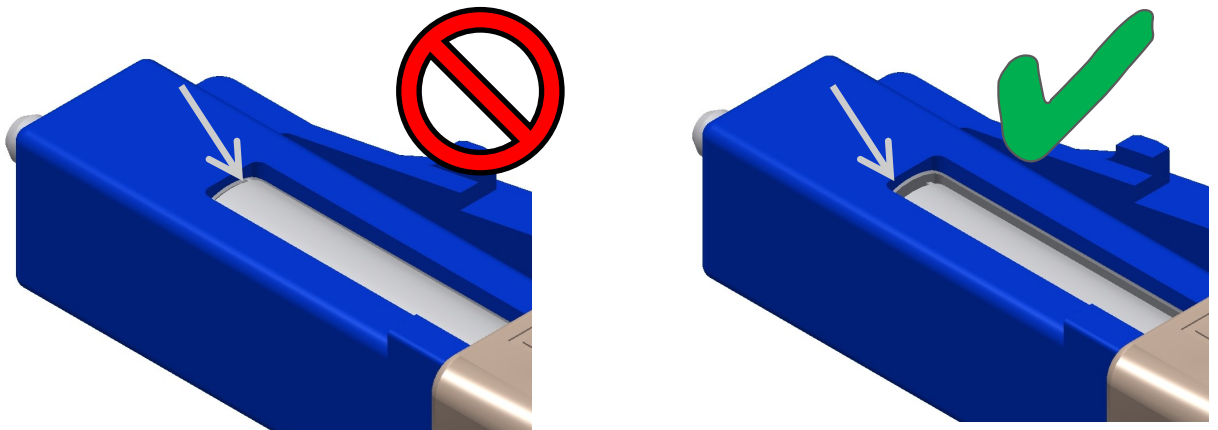


2.19 Slide boot next to the holder

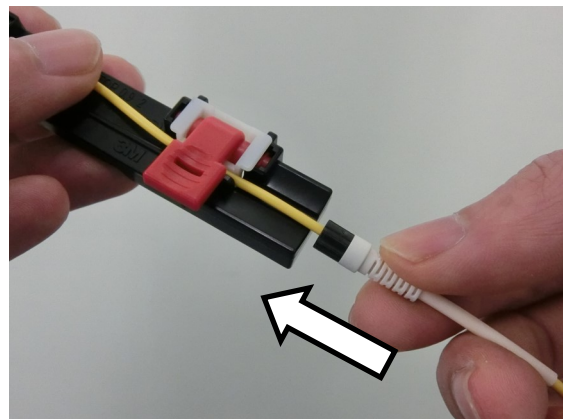

2.20 Release holder cover and bring boot closer to connector

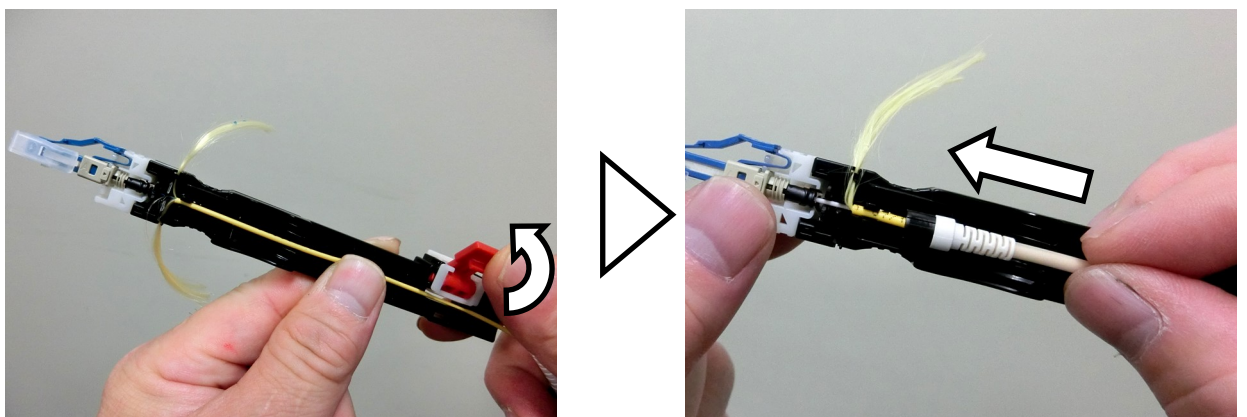


2.21 Remove aramid yarn from the slot and lay it on connector




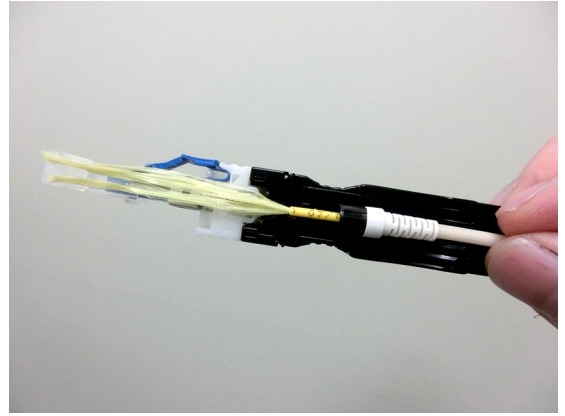


2.22 Hold aramid yarn and connector TOGETHER and remove from the cable holder.

Caution: Keep holding aramid yarn and connector together until boot is secured to the connector. Failure to do so may induce twist in fiber resulting in fiber break later

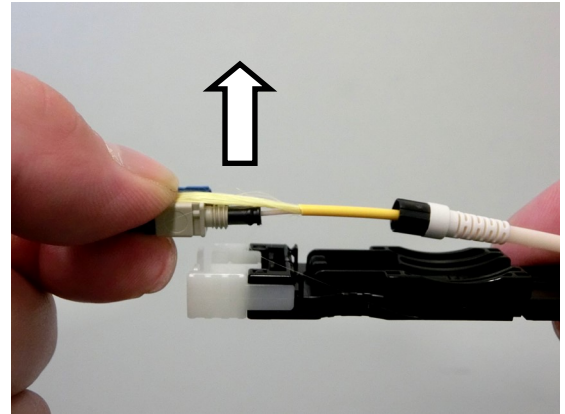


2.23 WHILE HOLDING ARAMID YARN AND CONNECTOR TOGETHER WITH ONE HAND, take about half of aramid yarn with another hand and bring it to the bottom side of connector.

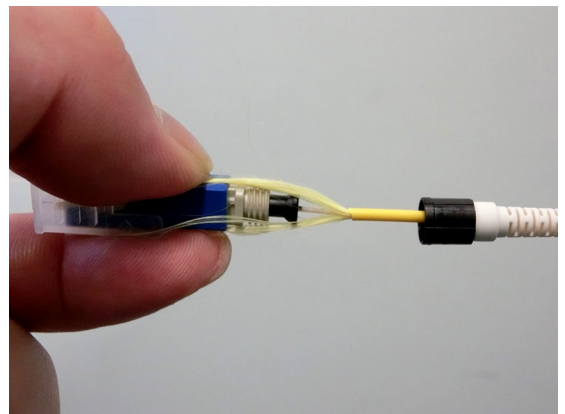
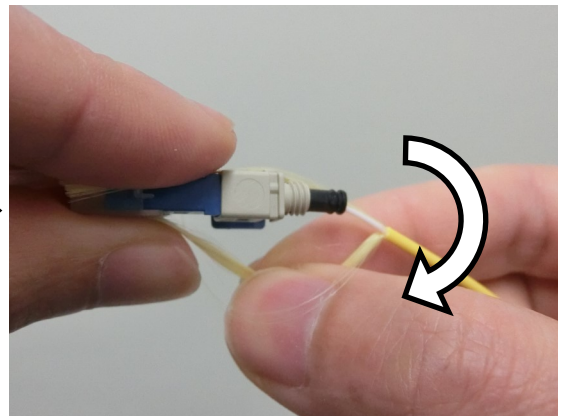
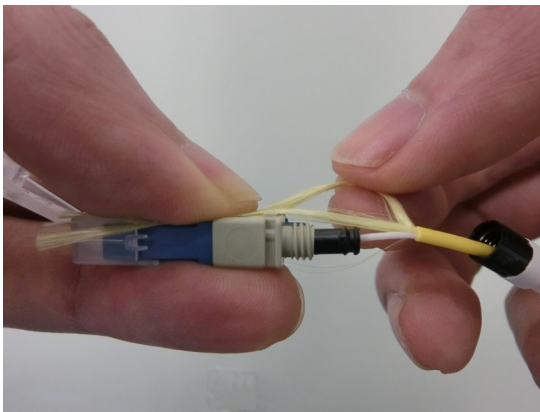


2.24 Bring boot up to connector


Caution: Keep holding aramid yarn and connector together until boot is secured to connector. Failure to do so may induce twist in fiber resulting in fiber break later

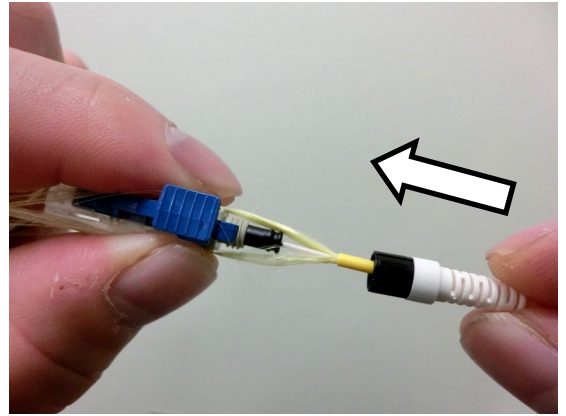

2.25 Fully tighten boot WHILE HOLDING ARAMID YARN AND CONNECTOR TOGETHER.

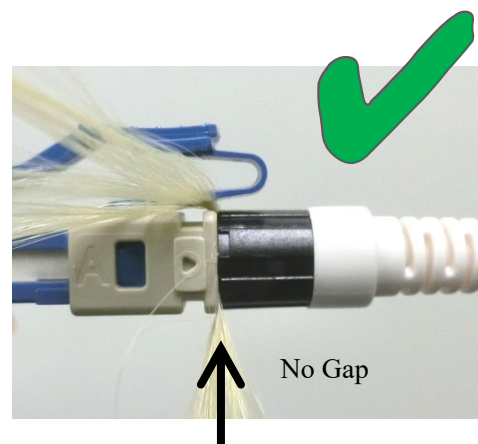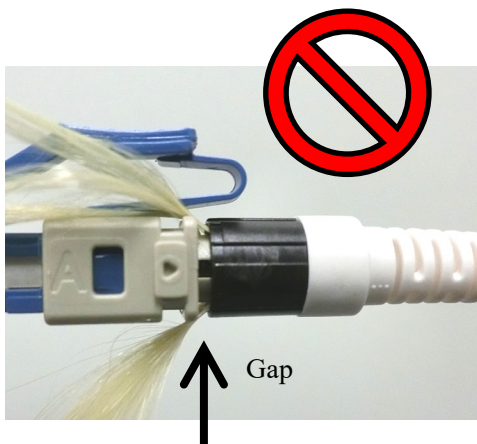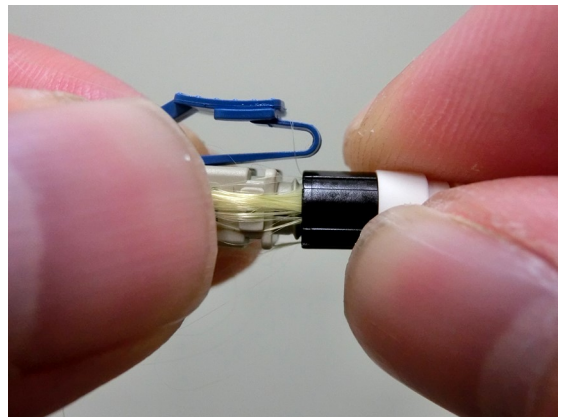


2.26 Trim off excess aramid yarn with snips. Termination completed.

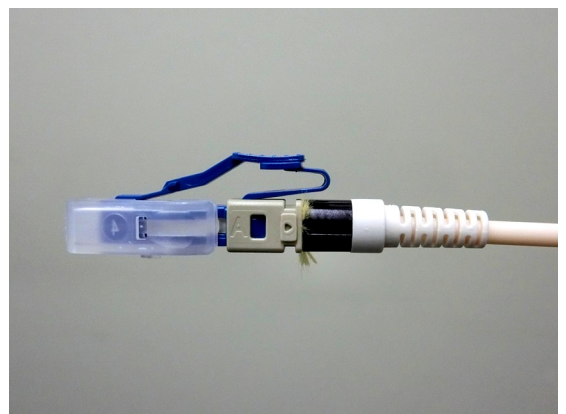


3.0 Duplexing No Polish LC-JG1 Connectors

3.1 No Polish LC-JG1 can be duplexed without using extra parts. Two connectors can dovetail together to form duplex connector


3.2 Identify dovetailing features on both sides of connector body

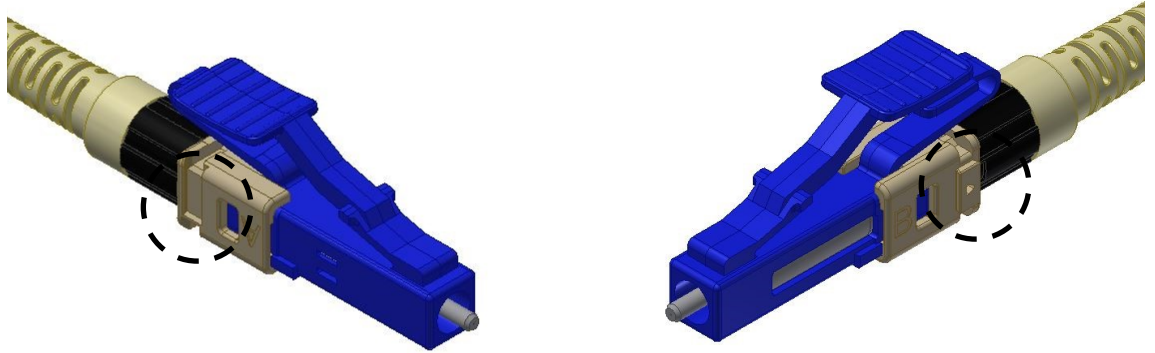

3.3 Dovetail two connectors to assemble them together

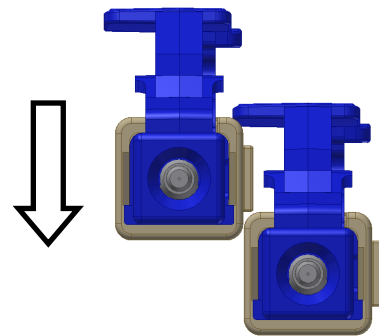


3.4 Make sure latches are fitting together

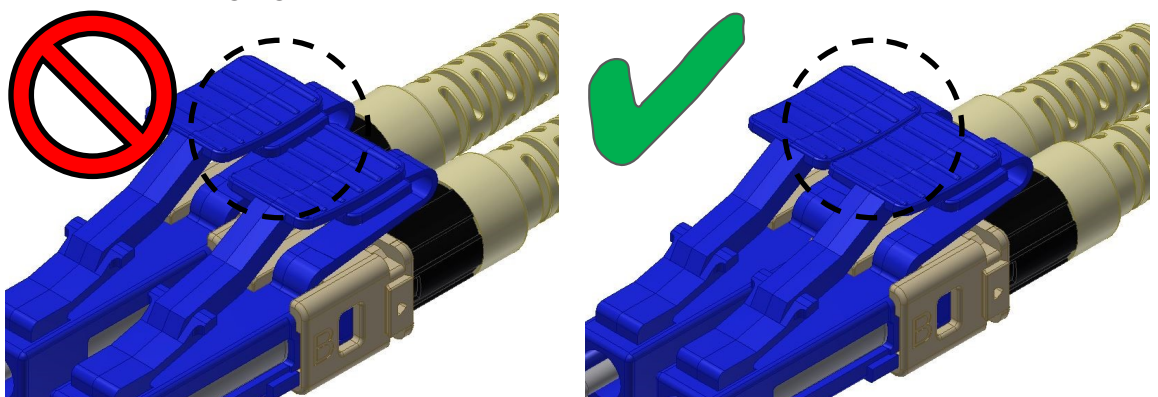


4.0 Connector re-open


4.1 Insert two forks on the dust cap into slots on back side of connector

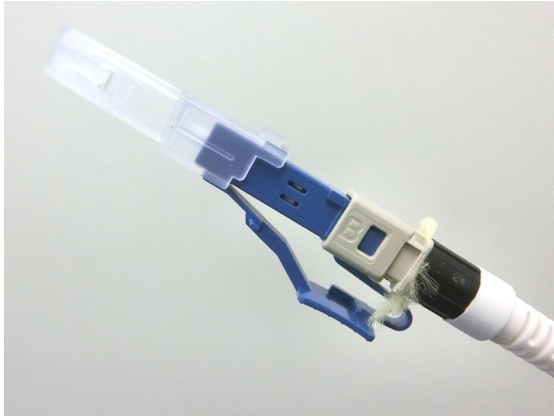

4.2 Unscrew and remove boot from connector.

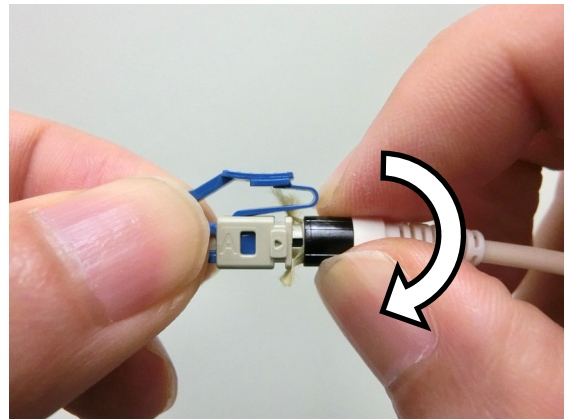

4.3 Pull out buffer clamp with fingers then remove fiber from the connector

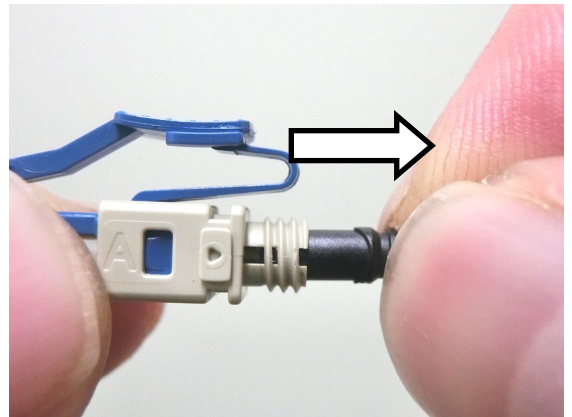

Important Notice

All statements, technical information, and recommendations related to Corning products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in Corning current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of Corning.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **CORNING MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at Corning's option, to replace or repair the Corning product or refund the purchase price of the Corning product. **Except where prohibited by law, Corning will not be liable for any loss or damage arising from this Corning product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**