

Specification

for

Mitsubishi Electric AC Servo System

Encoder / Power supply cable

Type SC-AEP3J2C0.3M-■-L

MITSUBISHI ELECTRIC
SYSTEM & SERVICE CO.,LTD

Note											
Revision								Drawn	Check	Design	Approved
A	7 June 2024							N.Ishii	S.Kariya	T.Kasahara	D.Fukushima
Send to								Date		Dwg	
								24 Apr., 2019		X953503D70003-E04A	
								Order			

1. SCOPE

This specification covers the requirements for the Mitsubishi Electric AC Servo System Encoder / Power supply cable.

- SC-AEP3J2C0.3M-■-L

※ The products specified in this specification comply with the EU RoHS Directive.

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

SC -	AEP	3	J2	C	0.3M	-	■	-	L	
					Sign	Bending life				
					L	Standard (For fixed part)				
					Sign	Cable lead out direction				
					A1	Motor shaft side				
					A2	Opposite of motor shaft				
					A5	Vertical side				
					Sign	Length of cable				
					0.3M	0.3m				
					Sign	Relay connection side connector specifications				
					J2	IP67 relay connector				
					Sign	Motor connection side connector specifications				
					3	1 connector / 2 cables (Power supply cable with shield)				
					Sign	Application				
					AEP	Encoder / Power supply cable				

3. APPLICABLE STANDARDS

Wire part : UL standard (UL 758 : AWM)

Application department	UL Style No.	Rated	
Encoder cable side	20276	80°C	30V
Power supply cable side	2586	105°C	600V

4. APPLICABLE MOTOR / APPLICABLE CABLE LENGTH

0.3m

※ For applicable motors, connection cables, and total cable lengths, refer to the cable selection table "R9535021-018028-015" and cable length selection table "R9535021-018028-010".

5. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-AEP3J2C0.3M-■-L xxxxxxx

※ ■ is cable lead out direction from A1, A2, or A5.

※ xxxxxxx are the serial number for seven digits.

6. STRUCTURE AND CHARACTERISTICS

(1) Wire

Item		Unit	Specification	
			For encoder	For power supply
Structure		—	AWG24×4P	AWG18×4C
Conductor	Conductor size	—	AWG24	AWG18
	Outer diameter	mm	Approx.0.6	Approx.1.3
Insulation	Material	—	PVC	ETFE
	Outer diameter	mm	Approx.1.1	Approx.1.8
Twisted pair	Number of insulated core wire	—	2C	—
	Outer diameter	mm	Approx.2.2	—
Twisted	Number of pairs	—	4P	—
	Number of insulated core wire	—	—	4C
Drain wire		—	Tin coated copper wire	—
Shield	Material	—	Tin coated copper braid	Tin coated copper braid
Sheath	Material	—	Flame resisting PVC	Flame resisting PVC
	color	—	Black	Black
Overall diameter		mm	Approx. 7.5	Approx. 7.5
Approx. weight		kg/km	80	95
Electrical characteristics	Insulation resistance	MΩ · km	Over 10	Over 100
	Withstand voltage	V / for 1 min	AC500	AC2000
Minimum bend radius		mm	6 times the overall diameter	6 times the overall diameter
Flame retardant		—	UL1581 VW-1	UL1581 VW-1

(2) Connector

Amplifier side	Encoder side	Type	DDK Ltd. CMV1-CR10P-M2 (Cable receptacle)
		IP rating	IP67 ^{*1}
	Power supply side	Type	DDK Ltd. D/MS3101A18-10P(D263) (Cable receptacle) CE02-18BS-S-D (Waterproof straight back shell) CE3057-10A-3-D (Cable clamp)
		IP rating	IP67 ^{*1}
Motor side	Cable lead out direction A1, A2	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVLD(7.5) (Connector set)
		IP rating	IP65 ^{*1}
	Cable lead out direction A5	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVSD(7.5) (Connector set)
		IP rating	IP65 ^{*1}


*1 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

(3) Cable harness


Environment	Ambient temperature	°C	0 to 60 (non-freezing)
	Ambient humidity	%RH	5 to 95 (non-condensing)
	Ambience	—	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust
Electrical characteristics	Insulation resistance	MΩ · km	Over 10
	Withstand voltage	V / for 1 min	For encoder : AC500 For power supply / brake : AC1800

7. STRUCTURAL DRAWING

7.1. For encoder

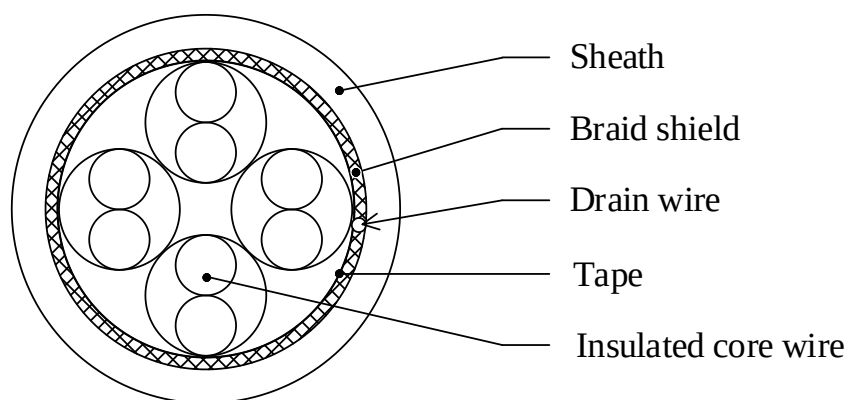


7.2. For power supply

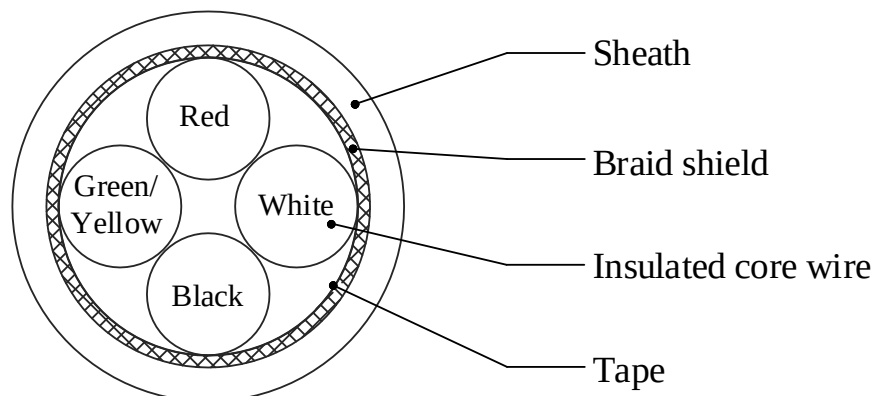

8. OUTLINE DRAWING

(1) SC-AEP3J2C0.3M -A1-L/ SC-AEP3J2C0.3M -A2-L

[Unit : mm]

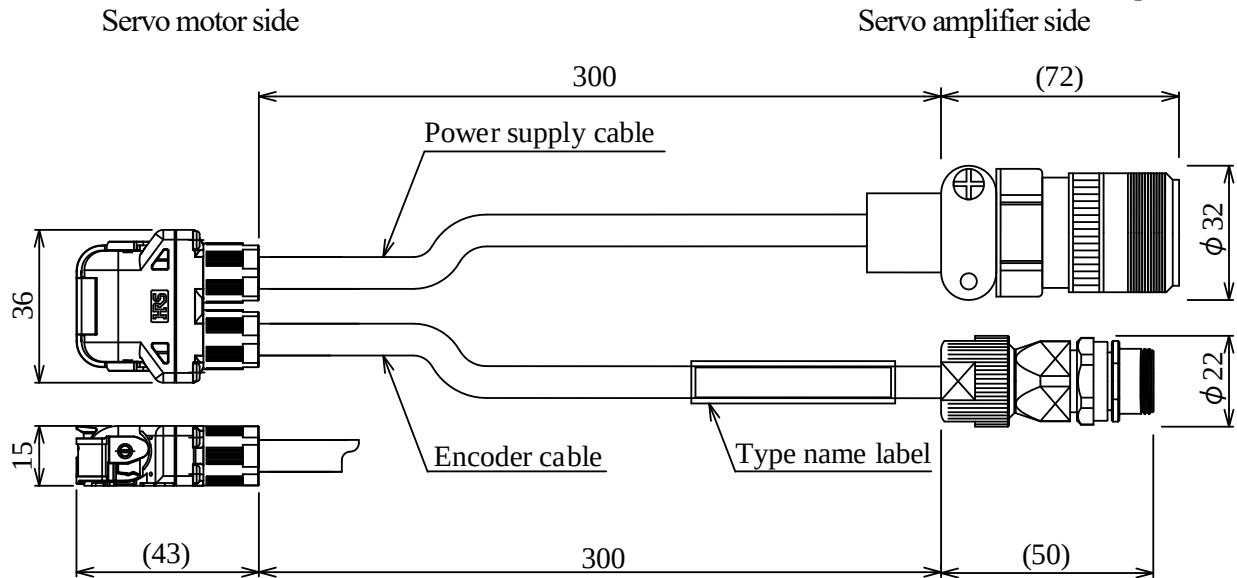

※ This outline drawing is for the cable lead out direction "A2".

The cable lead out direction "A1" reverses the position of the encoder cable and the power supply cable.

(2) SC-AEP3J2C0.3M -A5-L

[Unit : mm]

