

Specification

for

Mitsubishi Electric AC Servo System

Encoder / Power supply brake cable

Type SC-AEPB4C□M-■-H

MITSUBISHI ELECTRIC
SYSTEM & SERVICE CO.,LTD

Note							
Revision				Drawn	Check	Design	Approved
				N.Ishii	S.Kariya	T.Kasahara	D.Fukushima
Send to				Date		Dwg	
						X953503D70003-E11	
				7 June 2024			
				Order			

1. SCOPE


This specification covers the requirements for the Mitsubishi Electric AC Servo System Encoder / Power supply brake cable.

• SC-AEPB4C□M-■-H

※ The products specified in this specification comply with the EU RoHS Directive.

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

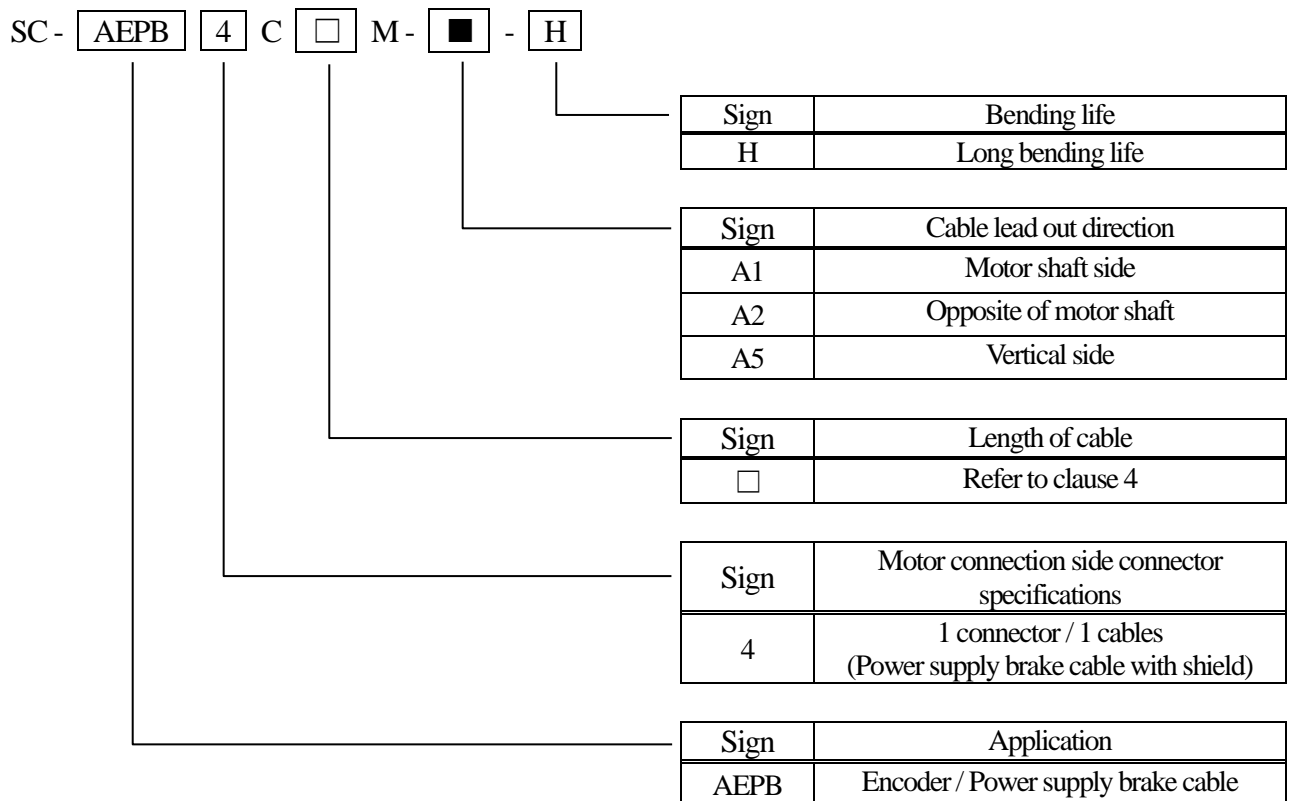

3. APPLICABLE STANDARDS

Wire part : UL standard (UL 758 : AWM)

UL Style No.	Rated	
2586	105°C	600V

4. LENGTH OF CABLE

0.5m to 20m

※ The maximum cable length differs depending on the motor.

Refer to the cable length selection table "R9535021-018028-010" for details.

5. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-AEPB4C□M-■-H xxxxxxx

※ □ is a figure from 0.5 to 20.

※ ■ is cable lead out direction from A1, A2, or A5.

※ xxxxxxx are the serial number for seven digits.

6. STRUCTURE AND CHARACTERISTICS

(1) Wire

Item		Unit	Specification		
			For power supply	For brake	For encoder
Structure		—	AWG18×4C + AWG24×2C + (AWG22×3P)		
Conductor	Conductor size	—	AWG18	AWG24	AWG22
	Outer diameter	mm	Approx.1.4	Approx.0.7	Approx.0.8
Insulation	Material	—	ETFE		
	Outer diameter	mm	Approx.1.9	Approx.1.2	Approx.1.3
Twisted pair	Number of insulated core wire	—	—	—	2C
	Outer diameter	mm	—	—	Approx.2.5
Twisted	Number of pairs	—	—	—	3P
	Number of insulated core wire	—	4C	2C	—
Shield	Material	—	Tin coated copper braid		
Sheath	Material	—	Flame resisting PVC		
	color	—	Black		
Overall diameter		mm	Approx. 11.9		
Approx. weight		kg/km	210		
Electrical characteristics	Insulation resistance	MΩ · km	Over 100		
	Withstand voltage	V / for 1 min	AC2000		
Minimum bend radius		mm	6 times the overall diameter		
Bending life		—	Over 1 million times ^{*1} (by Minimum bend radius)		
Flame retardant		—	UL1581 VW-1		

*1 It is a test outcome, and not a guaranteed value. (The performance is different according to customer's environment.)

(2) Connector


Amplifier side	Encoder side	Type	Molex Japan Co., Ltd. 54599-1016 (Connector set)
		IP rating	IP20 ^{*2}
	Power supply/ brake side	—	Discrete wires
Motor side	Cable lead out direction A1, A2	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVL(11.9) (Connector set)
		IP rating	IP65 ^{*2}
	Cable lead out direction A5	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVS(11.9) (Connector set)
		IP rating	IP65 ^{*2}

*2 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

(3) Cable harness

Environment	Ambient temperature	°C	0 to 60 (non-freezing)
	Ambient humidity	%RH	5 to 95 (non-condensing)
	Ambience	—	Indoors (no direct sunlight), no corrosive gas, inflammable gas, oil mist, or dust
Electrical characteristics	Insulation resistance	MΩ · km	Over 10
	Withstand voltage	V / for 1 min	For encoder : AC500 For power supply / brake : AC1800


7. STRUCTURAL DRAWING

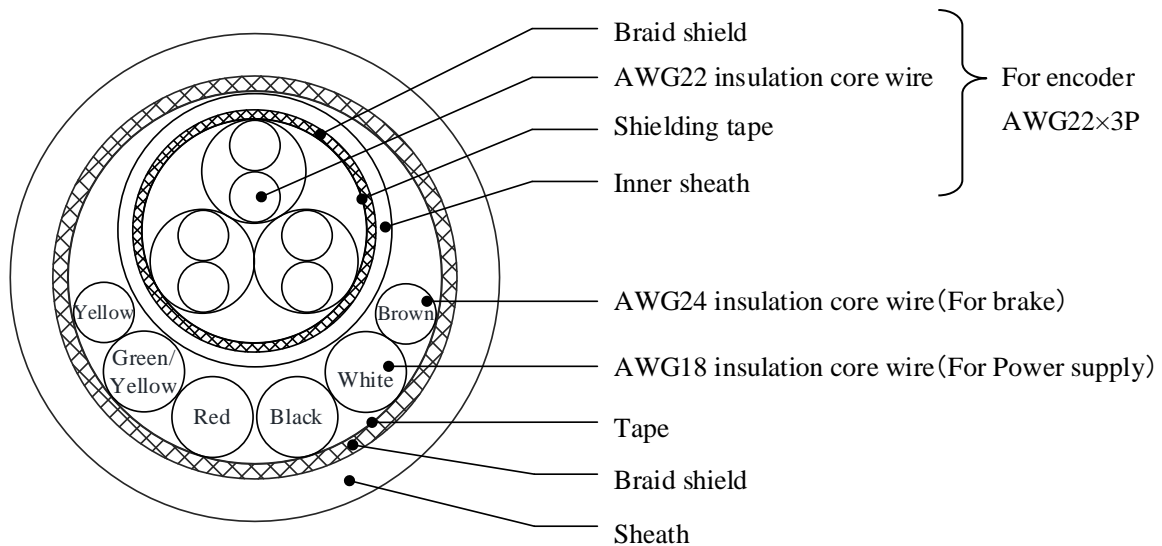

8. OUTLINE DRAWING


(1) SC-AEPB4C□M-A1-H / SC-AEPB4C□M-A2-H

[Unit : mm]

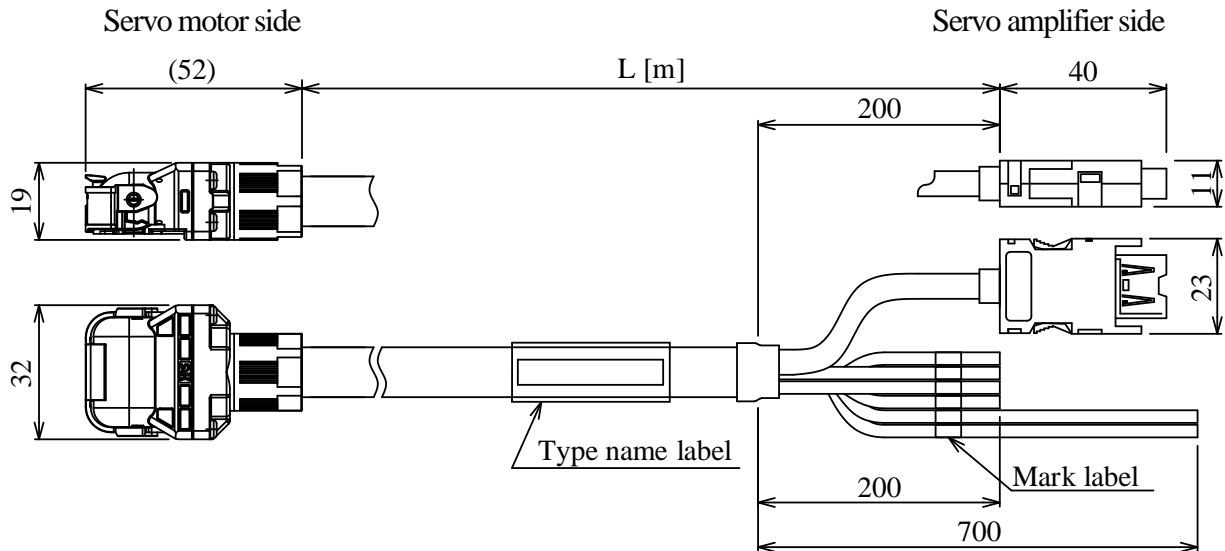

(2) SC-AEPB4C□M-A5-H

[Unit : mm]

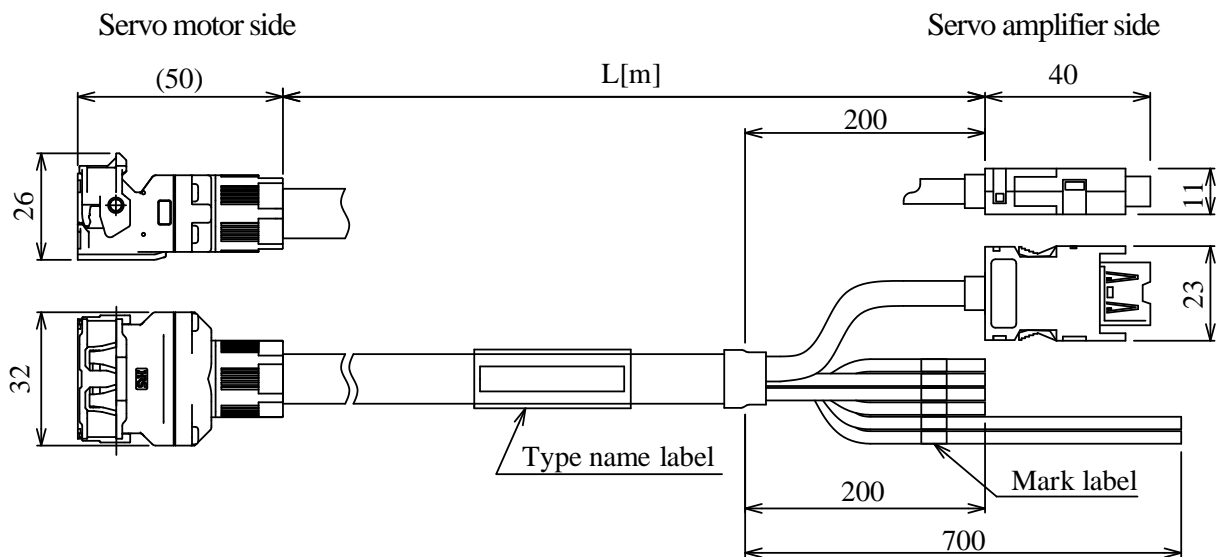

Refer to the following table for mark label and insulation color.

Application	Mark label	Insulation color
For motor power supply	U	Red
	V	White
	W	Black
	E	Green / Yellow
For brake circuit	B1	Yellow
	B2	Brown