

Specification

for

Mitsubishi Electric AC Servo System

Encoder / Power supply brake cable

Type SC-AEPB3J2TC□M-■-H

MITSUBISHI ELECTRIC
SYSTEM & SERVICE CO.,LTD

Note							
Revision				Drawn	Check	Design	Approved
A	7 June 2024			N.Ishii	S.Kariya	T.Kasahara	D.Fukushima
Send to				Date		Dwg	
						X953503D70003-E76A	
				6 Sep.,2022			
				Order			

1. SCOPE

This specification covers the requirements for the Mitsubishi Electric AC Servo System Encoder / Power supply brake cable.

- SC-AEPB3J2TC□M-■-H

※ The products specified in this specification comply with the EU RoHS Directive.

※ UL's Wiring Harnesses Traceability program provides traceability for this cable.

2. CABLE TYPE

SC - AEPB 3 J2 T C □ M - ■ - H

	Sign	Bending life
	H	Long bending life
	Sign	Cable lead out direction
	A1	Motor shaft side
	A2	Opposite of motor shaft
	A5	Vertical side
	Sign	Length of cable
	□	Refer to clause 4
	Sign	Communication method
	T	Two-wire type
	Sign	Relay connection side connector specifications
	J2	IP67 relay connector
	Sign	Motor connection side connector specifications
	3	1 connector / 2 cables (Power supply brake cable with shield)
	Sign	Application
	AEPB	Encoder / Power supply brake cable

3. APPLICABLE STANDARDS

Wire part : UL standard (UL 758 : AWM)

Application department	UL Style No.	Rated	
Encoder cable side	20276	80°C	30V
Power supply / brake cable side	2586	105°C	600V

4. APPLICABLE SERVO MOTOR / LENGTH OF CABLE

1 to 5m

※Refer to the CABLE SELECTION TABLE "R9535021-018028-015" and CABLE LENGTH SELECTION TABLE "R9535021-018028-010" for applicable motors, connection cables and total cable length.

5. EXAMPLE OF PRINTING CABLE TYPE NAME

SC-AEPB3J2TC□M-■-H ×××××××

- ※ □ is a figure from 1 to 5.
- ※ ■ is cable lead out direction from A1, A2, or A5.
- ※ ××××××× are the serial number for seven digits.

6. STRUCTURE AND CHARACTERISTICS

(1) Wire

Item		Unit	Specification		
			For encoder	For power supply / brake	
Structure		—	AWG22×3P	AWG18×4C+AWG24×2C	
Conductor	Conductor size	—	AWG22	AWG18	AWG24
	Outer diameter	mm	Approx.0.8	Approx.1.4	Approx.0.7
Insulation	Material	—	ETFE	ETFE	
	Outer diameter	mm	Approx.1.2	Approx.1.9	Approx.1.1
Twisted pair	Number of insulated core wire	—	2C	—	
	Outer diameter	mm	Approx.2.3	—	
Twisted	Number of pairs	—	3P	—	—
	Number of insulated core wire	—	—	4C	2C
Shield	Material	—	Tin coated copper braid	Tin coated copper braid	
Sheath	Material	—	Flame resisting PVC	Flame resisting PVC	
	color	—	Black	Black	
Overall diameter		mm	Approx. 7.5	Approx. 7.5	
Approx. weight		kg/km	80	100	
Electrical characteristics	Insulation resistance	MΩ · km	Over 100	Over 100	
	Withstand voltage	V / for 1 min	AC500	AC2000	
Minimum bend radius		mm	6 times the overall diameter	6 times the overall diameter	
Bending life		—	Over 1 million times ^{*1} (by Minimum bend radius)	Over 1 million times ^{*1} (by Minimum bend radius)	
Flame retardant		—	UL1581 VW-1	UL1581 VW-1	

*1 It is a test outcome, and not a guaranteed value. (The performance is different according to customer's environment.)

(2) Connector

Amplifier side	Encoder side	Type	DDK Ltd. CMV1-CR10P-M2 (Cable receptacle)
		IP rating	IP67 ^{*2}
	Power supply / brake side	Type	DDK Ltd. D/MS3101A22-23P(D263) (Cable receptacle) CE02-22BS-S-D(R1) (Waterproof straight back shell) CE3057-12A-3-D(R1) (Cable clamp)
		IP rating	IP67 ^{*2}
Motor side	Cable lead out direction A1, A2	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVLD(7.5) (Connector set)
		IP rating	IP65 ^{*2}
	Cable lead out direction A5	Type	Hirose Electric Co., Ltd. MT50W-8D/2D4ES-CVSD(7.5) (Connector set)
		IP rating	IP65 ^{*2}


*2 The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo amplifier/servo motor. If the IP rating of the servo amplifier/servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

(3) Cable harness


Environment	Ambient temperature	°C	0 to 60 (non-freezing)
	Ambient humidity	%RH	5 to 95 (non-condensing)
	Ambience	—	Indoors (no direct sunlight), no corrosive gas, inflammable gas, oil mist, or dust
Electrical characteristics	Insulation resistance	MΩ · km	Over 10
	Withstand voltage	V / for 1 min	For encoder : AC500 For power supply / brake: AC1800

7. STRUCTURAL DRAWING

7.1. For encoder

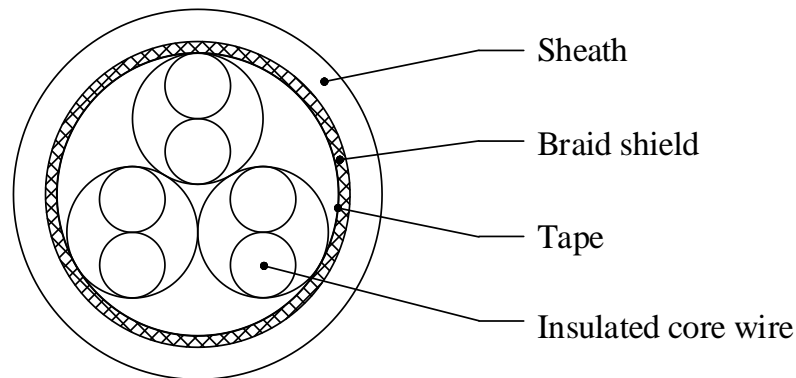


7.2. For power supply / brake

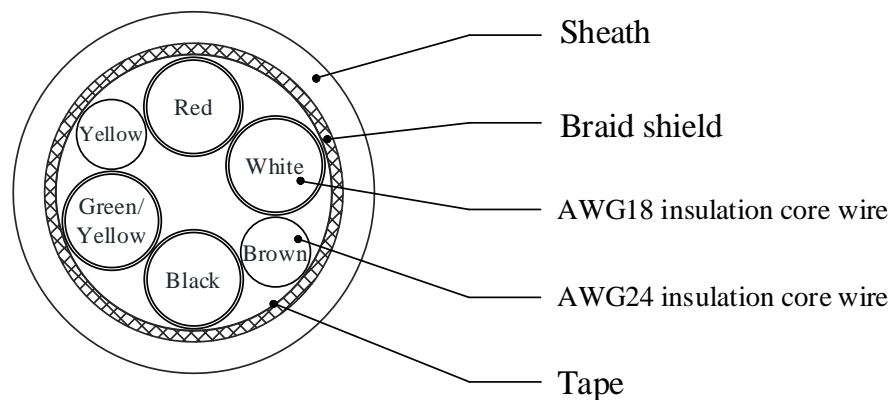

8. OUTLINE DRAWING

(1) SC-AEPB3J2TC□M-A1-H / SC-AEPB3J2TC□M-A2-H

[Unit : mm]

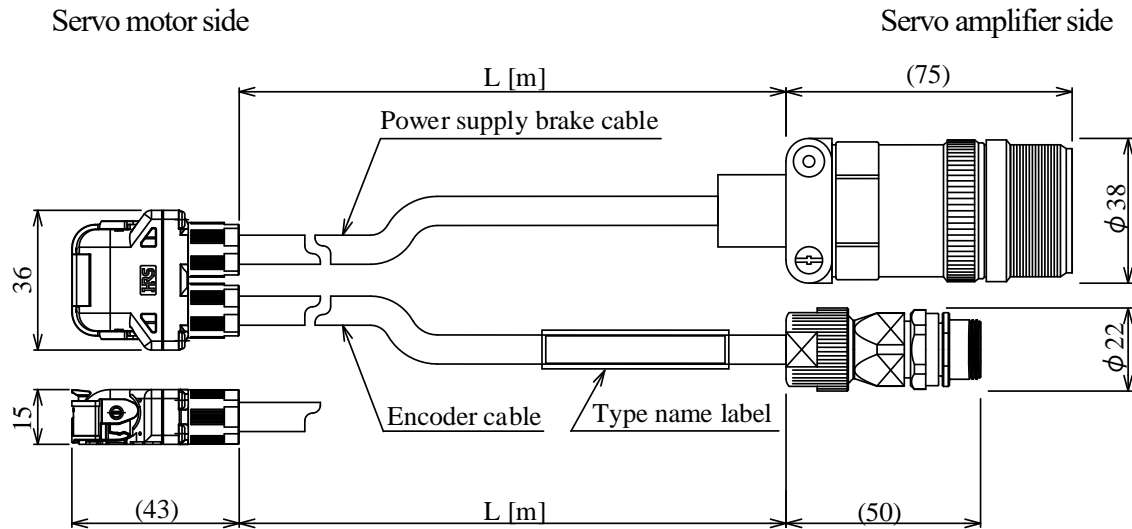

※ This outline drawing is for the cable lead out direction “A2”.

The cable lead out direction “A1” reverses the position of the encoder cable and the power supply brake cable.

(2) SC-AEPB3J2TC□M-A5-H

[Unit : mm]

